

1.27mm DUAL ROW FEMALE HEADER





1286 SERIES. 1.27 x 2.54mm(0.050 x 0.50"). For PCB Solder

Features

- Available in 6 through 100 circuits
- Insulator Material: Nylon 6-T UL 94V-0
- Mates with 1.27 X 2.54mm Pitch and 0.46mm square or round pin header
- Profile: 4.60mm
- Low profile and High density
- High reliability contact in phosphor bronze
- For other options consult the Sales Office

Dimensional Information

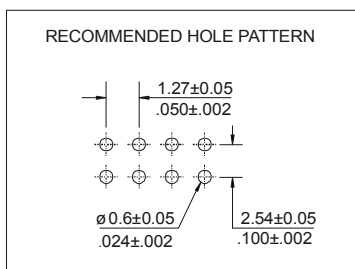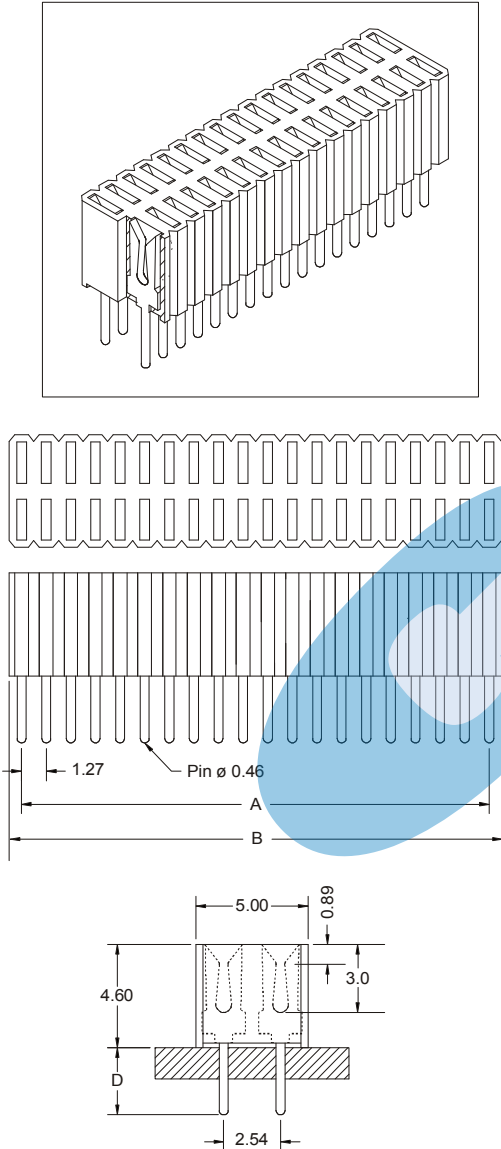

Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
06	1286-T06C	2.54 (0.100)	3.81 (0.150)
08	1286-T08C	3.81 (0.150)	5.08 (0.200)
10	1286-T10C	5.08 (0.200)	6.35 (0.250)
12	1286-T12C	6.35 (0.250)	7.62 (0.300)
14	1286-T14C	7.62 (0.300)	8.89 (0.350)
16	1286-T16C	8.89 (0.350)	10.16 (0.400)
18	1286-T18C	10.16 (0.400)	11.43 (0.450)
20	1286-T20C	11.43 (0.450)	12.70 (0.500)
22	1286-T22C	12.70 (0.500)	13.97 (0.550)
24	1286-T24C	13.97 (0.550)	15.24 (0.600)
26	1286-T26C	15.24 (0.600)	16.51 (0.650)
28	1286-T28C	16.51 (0.650)	17.78 (0.700)
30	1286-T30C	17.78 (0.700)	19.05 (0.750)
32	1286-T32C	19.05 (0.750)	20.32 (0.800)
34	1286-T34C	20.32 (0.800)	21.59 (0.850)
36	1286-T36C	21.59 (0.850)	22.86 (0.900)
38	1286-T38C	22.86 (0.900)	24.13 (0.950)
40	1286-T40C	24.13 (0.950)	25.40 (1.000)
42	1286-T42C	25.40 (1.000)	26.67 (1.050)
44	1286-T44C	26.67 (1.050)	27.94 (1.100)
46	1286-T46C	27.94 (1.100)	29.21 (1.150)
48	1286-T48C	29.21 (1.150)	30.48 (1.200)
50	1286-T50C	30.48 (1.200)	31.75 (1.250)
52	1286-T52C	31.75 (1.250)	33.02 (1.300)
54	1286-T54C	33.02 (1.300)	34.29 (1.350)
56	1286-T56C	34.29 (1.350)	35.56 (1.400)
58	1286-T58C	35.56 (1.400)	36.83 (1.450)
60	1286-T60C	36.83 (1.450)	38.10 (1.500)
62	1286-T62C	38.10 (1.500)	39.37 (1.550)
64	1286-T64C	39.37 (1.550)	40.64 (1.600)
66	1286-T66C	40.64 (1.600)	41.91 (1.650)
68	1286-T68C	41.91 (1.650)	43.18 (1.700)
70	1286-T70C	43.18 (1.700)	44.45 (1.750)
72	1286-T72C	44.45 (1.750)	45.72 (1.800)
74	1286-T74C	45.72 (1.800)	46.99 (1.850)
76	1286-T76C	46.99 (1.850)	48.26 (1.900)
78	1286-T78C	48.26 (1.900)	49.53 (1.950)
80	1286-T80C	49.53 (1.950)	50.80 (2.000)
82	1286-T82C	50.80 (2.000)	52.07 (2.050)
84	1286-T84C	52.07 (2.050)	53.34 (2.100)
86	1286-T86C	53.34 (2.100)	54.61 (2.150)
88	1286-T88C	54.61 (2.150)	55.88 (2.200)
90	1286-T90C	55.88 (2.200)	57.15 (2.250)
92	1286-T92C	57.15 (2.250)	58.42 (2.300)
94	1286-T94C	58.42 (2.300)	59.69 (2.350)
96	1286-T96C	59.69 (2.350)	60.96 (2.400)
98	1286-T98C	60.96 (2.400)	62.23 (2.450)
100	1286-T100C	62.23 (2.450)	63.50 (2.500)

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel
Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

C = Pin Length

- C = 1. D = 2.40mm
- C = 2. D = 3.00mm
- C = 3. D = 1.50mm