

# FEMALE HEADER FOR FLAT CABLE







## 1335 SERIE. 1.27 x 1.27 mm. (0.050 x 0.050").

### Features

- Available in 12, 26, 50, 68 and 80 circuits
- Mates with male headers 1.27 x 1.27 mm 1336, 1337 and 1338 series
- Insulator material: glass filled UL 94V-0
- Phosphor bronze terminal
- Available in different plating
- Dielectric rigidity: 250V AC / 1 minute
- Flat cable 0.635 mm assembly 9063 / 9064 serie

### Dimensional information:

### Ordering and dimensional information:

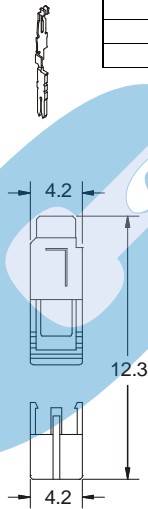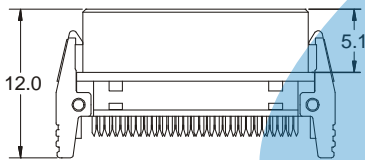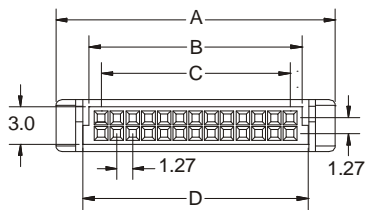

Circuit Size	Part Number	Dimensions			
		A	B	C	D
12	<b>1335 - T120</b>	12.69 (0.500)	8.30 (0.327)	6.35 (0.250)	9.30 (0.366)
26	<b>1335 - T260</b>	21.58 (0.850)	17.19 (0.677)	15.24 (0.600)	18.19 (0.716)
50	<b>1335 - T500</b>	36.82 (1.450)	32.43 (1.277)	30.48 (1.200)	33.43 (1.316)
68	<b>1335 - T680</b>	48.25 (1.900)	43.86 (1.727)	41.91 (1.650)	44.86 (1.766)
80	<b>1335 - T800</b>	55.87 (2.200)	51.48 (2.027)	49.53 (1.950)	52.48 (2.066)

### T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel.  
Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel