

# 1.27mm SINGLE ROW DOUBLE BODY HEADER




## 1351 SERIES. 1.27mm(0.050"). For PCB Solder

### Features

- Available in 4 through 50 circuits
- Mates with 1.27mm single row housing and socket
- Insulator Material: Thermoplastic UL 94V-0
- 0.46mm square pin in copper alloy
- Different plating options are available
- Different pin lengths are available
- For other options consult the Sales Office

### Dimensional Information

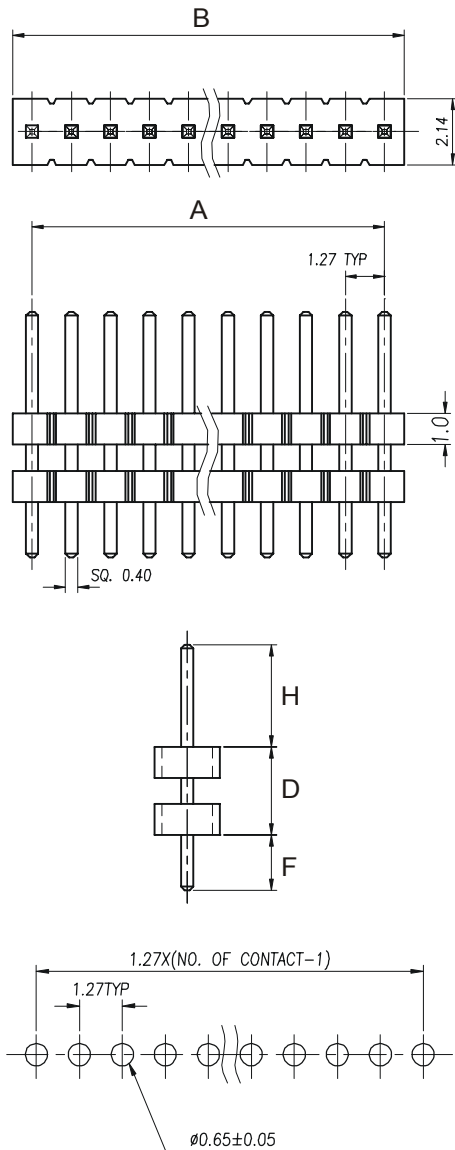

Unit: mm.  
Inch.

### Ordering and Dimensional Information

Circuit size	Part number	Dimensions	
		A	B
04	1351-T04C	3,81(0,150)	5,08(0,200)
05	1351-T05C	5,08(0,200)	6,35(0,250)
06	1351-T06C	6,35(0,250)	7,62(0,300)
07	1351-T07C	7,62(0,300)	8,89(0,350)
08	1351-T08C	8,89(0,350)	10,16(0,400)
09	1351-T09C	10,16(0,400)	11,43(0,450)
10	1351-T10C	11,43(0,450)	12,70(0,500)
11	1351-T11C	12,70(0,500)	13,97(0,550)
12	1351-T12C	13,97(0,550)	15,24(0,600)
13	1351-T13C	15,24(0,600)	16,51(0,650)
14	1351-T14C	16,51(0,650)	17,78(0,700)
15	1351-T15C	17,78(0,700)	19,05(0,750)
16	1351-T16C	19,05(0,750)	20,32(0,800)
17	1351-T17C	20,32(0,800)	21,59(0,850)
18	1351-T18C	21,59(0,850)	22,86(0,900)
19	1351-T19C	22,86(0,900)	24,13(0,950)
20	1351-T20C	24,13(0,950)	25,40(1,000)
21	1351-T21C	25,40(1,000)	26,67(1,050)
22	1351-T22C	26,67(1,050)	27,94(1,100)
23	1351-T23C	27,94(1,100)	29,21(1,150)
24	1351-T24C	29,21(1,150)	30,48(1,200)
25	1351-T25C	30,48(1,200)	31,75(1,250)
26	1351-T26C	31,75(1,250)	33,02(1,300)
27	1351-T27C	33,02(1,300)	34,29(1,350)
28	1351-T28C	34,29(1,350)	35,56(1,400)
29	1351-T29C	35,56(1,400)	36,83(1,450)
30	1351-T30C	36,83(1,450)	38,10(1,500)
31	1351-T31C	38,10(1,500)	39,37(1,550)
32	1351-T32C	39,37(1,550)	40,64(1,600)
33	1351-T33C	40,64(1,600)	41,91(1,650)
34	1351-T34C	41,91(1,650)	43,18(1,700)
35	1351-T35C	43,18(1,700)	44,45(1,750)
36	1351-T36C	44,45(1,750)	45,72(1,800)
37	1351-T37C	45,72(1,800)	46,99(1,850)
38	1351-T38C	46,99(1,850)	48,26(1,900)
39	1351-T39C	48,26(1,900)	49,53(1,950)
40	1351-T40C	49,53(1,950)	50,80(2,000)
41	1351-T41C	50,80(2,000)	52,07(2,050)
42	1351-T42C	52,07(2,050)	53,34(2,100)
43	1351-T43C	53,34(2,100)	54,61(2,150)
44	1351-T44C	54,61(2,150)	55,88(2,200)
45	1351-T45C	55,88(2,200)	57,15(2,250)
46	1351-T46C	57,15(2,250)	58,42(2,300)
47	1351-T47C	58,42(2,300)	59,69(2,350)
48	1351-T48C	59,69(2,350)	60,96(2,400)
49	1351-T49C	60,96(2,400)	62,23(2,450)
50	1351-T50C	62,23(2,450)	63,50(2,500)

### RECOMMENDED HOLE PATTERN

- **NOTE:** The dimensions **H**, **D** and **F** are according to customer specifications
- Standard dimensions:  
C = 1. H: 3.00mm D: 2.35mm F: 2.85mm

For other options Consult the Sales Office

### T = Contact Plating

- T = 13. Selective gold flash over 50µ" nickel  
**Recommended Finish**
- T = 14. 10µ" selective gold over 50µ" nickel
- T = 16. 30µ" selective gold over 50µ" nickel