

DOUBLE BODY STRAIGHT HEADER SMT




1355 SERIE 1.27 x 2.54 mm. (0.050 x 0.100"). For PCB Solder

Features

- Available in 6 through 80 circuits
- Mates with housing and dual row header 1.27*2.54 mm
- Material: nylon 6T / polyester UL 94V-0
- Brass pin with different plating option
- 0.46 mm square pin
- Available with or without pivots of polarisation
- Without polarisation
- For other option consult the Sales Office

Dimensional information:

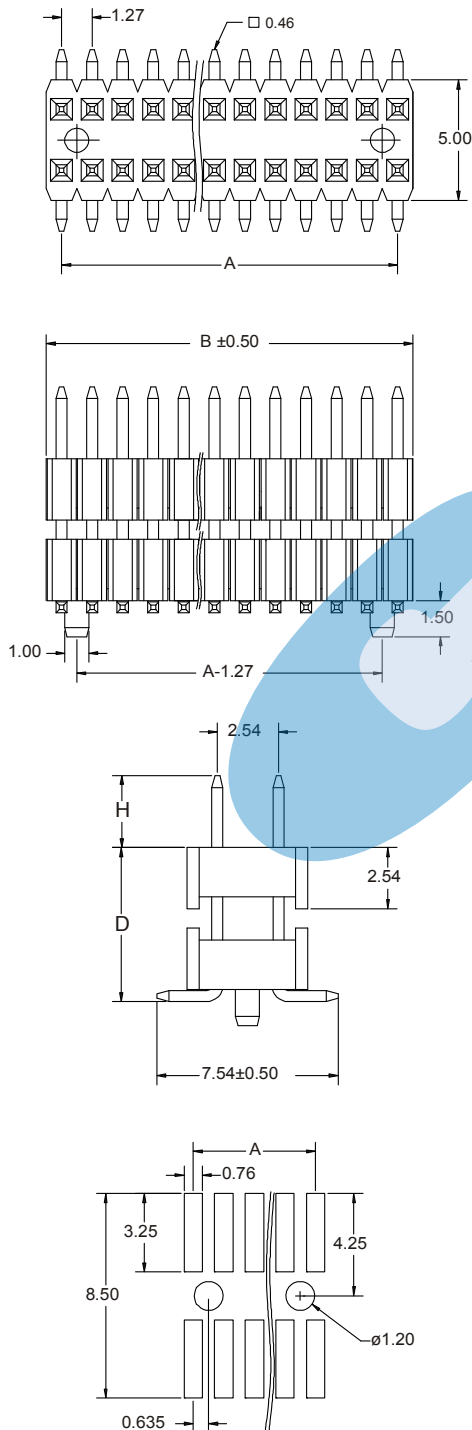

Ordering and dimensional information:

Circuit Size	Part Number		Dimensions	
	Without Pivots	With Pivots	A	B
06	1355-T061C	1355-T062C	2,54(0,100)	3,81(0,150)
08	1355-T081C	1355-T082C	3,81(0,150)	5,08(0,200)
10	1355-T101C	1355-T102C	5,08(0,200)	6,35(0,250)
12	1355-T121C	1355-T122C	6,35(0,250)	7,62(0,300)
14	1355-T141C	1355-T142C	7,62(0,300)	8,89(0,350)
16	1355-T161C	1355-T162C	8,89(0,350)	10,16(0,400)
18	1355-T181C	1355-T182C	10,16(0,400)	11,43(0,450)
20	1355-T201C	1355-T202C	11,43(0,450)	12,70(0,500)
22	1355-T221C	1355-T222C	12,70(0,500)	13,97(0,550)
24	1355-T241C	1355-T242C	13,97(0,550)	15,24(0,600)
26	1355-T261C	1355-T262C	15,24(0,600)	16,51(0,650)
28	1355-T281C	1355-T282C	16,51(0,650)	17,78(0,700)
30	1355-T301C	1355-T302C	17,78(0,700)	19,05(0,750)
32	1355-T321C	1355-T322C	19,05(0,750)	20,32(0,800)
34	1355-T341C	1355-T342C	20,32(0,800)	21,59(0,850)
36	1355-T361C	1355-T362C	21,59(0,850)	22,86(0,900)
38	1355-T381C	1355-T382C	22,86(0,900)	24,13(0,950)
40	1355-T401C	1355-T402C	24,13(0,950)	25,40(1,000)
42	1355-T421C	1355-T422C	25,40(1,000)	26,67(1,050)
44	1355-T441C	1355-T442C	26,67(1,050)	27,94(1,100)
46	1355-T461C	1355-T462C	27,94(1,100)	29,21(1,150)
48	1355-T481C	1355-T482C	29,21(1,150)	30,48(1,200)
50	1355-T501C	1355-T502C	30,48(1,200)	31,75(1,250)
52	1355-T521C	1355-T522C	31,75(1,250)	33,02(1,300)
54	1355-T541C	1355-T542C	33,02(1,300)	34,29(1,350)
56	1355-T561C	1355-T562C	34,29(1,350)	35,56(1,400)
58	1355-T581C	1355-T582C	35,56(1,400)	36,83(1,450)
60	1355-T601C	1355-T602C	36,83(1,450)	38,10(1,500)
62	1355-T621C	1355-T622C	38,10(1,500)	39,37(1,550)
64	1355-T641C	1355-T642C	39,37(1,550)	40,64(1,600)
66	1355-T661C	1355-T662C	40,64(1,600)	41,91(1,650)
68	1355-T681C	1355-T682C	41,91(1,650)	43,18(1,700)
70	1355-T701C	1355-T702C	43,18(1,700)	44,45(1,750)
72	1355-T721C	1355-T722C	44,45(1,750)	45,72(1,800)
74	1355-T741C	1355-T742C	45,72(1,800)	46,99(1,850)
76	1355-T761C	1355-T762C	46,99(1,850)	48,26(1,900)
78	1355-T781C	1355-T782C	48,26(1,900)	49,53(1,950)
80	1355-T801C	1355-T802C	49,53(1,950)	50,80(2,000)

T = Connector Plating

- T = 2. Tin-plated.
- T = 3. Gold flash over 1.27 µ Ni.
RECOMMENDED FINISH
- T = 4. 0.25 µ Gold over 1.27 µ Ni.
- T = 5. 0.38 µ Gold over 1.27 µ Ni.

C = Connector Dimensions

- C = 1. H = 3 mm.; D = 6.40 mm.
- C = 2. H = 3 mm.; D = 11.00 mm.