

DUAL ROW STRAIGHT HEADER D/ BASE




1365 SERIES. 1.27 x 1.27mm(0.050 x 0.050"). For PCB Solder


Features

- Available in 10 through 80 circuits
- Mates with 1.27mm(.050") dual row housing and socket
- Insulator Material: Thermoplastic UL 94V-0
- Different plating options are available
- 0.46mm square pin in copper alloy
- Different pin lengths are available
- For other options consult the Sales Office

Dimensional Information

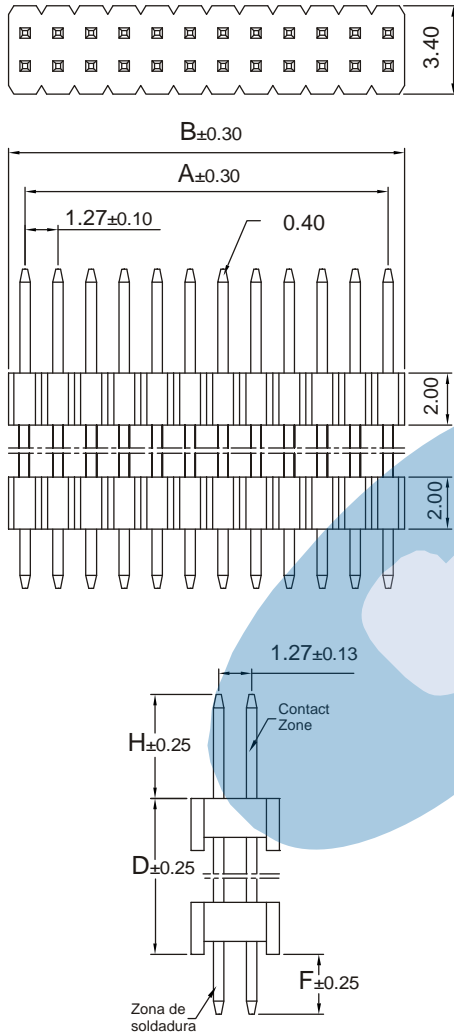

RECOMMENDED HOLE PATTERN
(Tolerance ±0.05)



Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
10	1365-T10C	5,08(0,200)	6,35(0,250)
12	1365-T12C	6,35(0,250)	7,62(0,300)
14	1365-T14C	7,62(0,300)	8,89(0,350)
16	1365-T16C	8,89(0,350)	10,16(0,400)
18	1365-T18C	10,16(0,400)	11,43(0,450)
20	1365-T20C	11,43(0,450)	12,70(0,500)
22	1365-T22C	12,70(0,500)	13,97(0,550)
24	1365-T24C	13,97(0,550)	15,24(0,600)
26	1365-T26C	15,24(0,600)	16,51(0,650)
28	1365-T28C	16,51(0,650)	17,78(0,700)
30	1365-T30C	17,78(0,700)	19,05(0,750)
32	1365-T32C	19,05(0,750)	20,32(0,800)
34	1365-T34C	20,32(0,800)	21,59(0,850)
36	1365-T36C	21,59(0,850)	22,86(0,900)
38	1365-T38C	22,86(0,900)	24,13(0,950)
40	1365-T40C	24,13(0,950)	25,40(1,000)
42	1365-T42C	25,40(1,000)	26,67(1,050)
44	1365-T44C	26,67(1,050)	27,94(1,100)
46	1365-T46C	27,94(1,100)	29,21(1,150)
48	1365-T48C	29,21(1,150)	30,48(1,200)
50	1365-T50C	30,48(1,200)	31,75(1,250)
52	1365-T52C	31,75(1,250)	33,02(1,300)
54	1365-T54C	33,02(1,300)	34,29(1,350)
56	1365-T56C	34,29(1,350)	35,56(1,400)
58	1365-T58C	35,56(1,400)	36,83(1,450)
60	1365-T60C	36,83(1,450)	38,10(1,500)
62	1365-T62C	38,10(1,500)	39,37(1,550)
64	1365-T64C	39,37(1,550)	40,64(1,600)
66	1365-T66C	40,64(1,600)	41,91(1,650)
68	1365-T68C	41,91(1,650)	43,18(1,700)
70	1365-T70C	43,18(1,700)	44,45(1,750)
72	1365-T72C	44,45(1,750)	45,72(1,800)
74	1365-T74C	45,72(1,800)	46,99(1,850)
76	1365-T76C	46,99(1,850)	48,26(1,900)
78	1365-T78C	48,26(1,900)	49,53(1,950)
80	1365-T80C	49,53(1,950)	50,80(2,000)

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel
Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

C = Pin Length

- C = 1. H = 2.35 mm.; D = 6.35 mm.; F = 2.30 mm.
- C = 2. H = 5.50 mm.; D = 3.00 mm.; F = 5.50 mm.
- C = 3. H = 9.00 mm.; D = 8.60 mm.; F = 2.85 mm.
- C = 4. H = 3.00 mm.; D = 4.30 mm.; F = 2.85 mm.
- C = 5. H = 4.00 mm.; D = 17.2 mm.; F = 2.30 mm.
- C = 6. H = 4.50 mm.; D = 10.0 mm.; F = 2.40 mm.
- C = 7. H = 6.00 mm.; D = 14.20 mm.; F = 6.00 mm
- C = 8. H = 6.00 mm.; D = 4.90 mm.; F = 6.00 mm
- C = 9. H = 5.00 mm.; D = 7.10 mm.; F = 5.00 mm.