

DUAL ROW BREAKAWAY R/ANGLE HEADER




1367 SERIES. 1.27 x 1.27mm(0.050 x 0.050"). For PCB Solder

Features

- Available in 08 through 100 circuits
- Insulator Material: Thermoplastic UL 94V-0
- Mates with 1.27mm dual row housing and socket
- Different plating options are available
- Easy breakaway to desired circuit size
- 0.40mm square pin in copper alloy
- Different pin lengths are available
- For other options consult the Sales Office

Dimensional Information

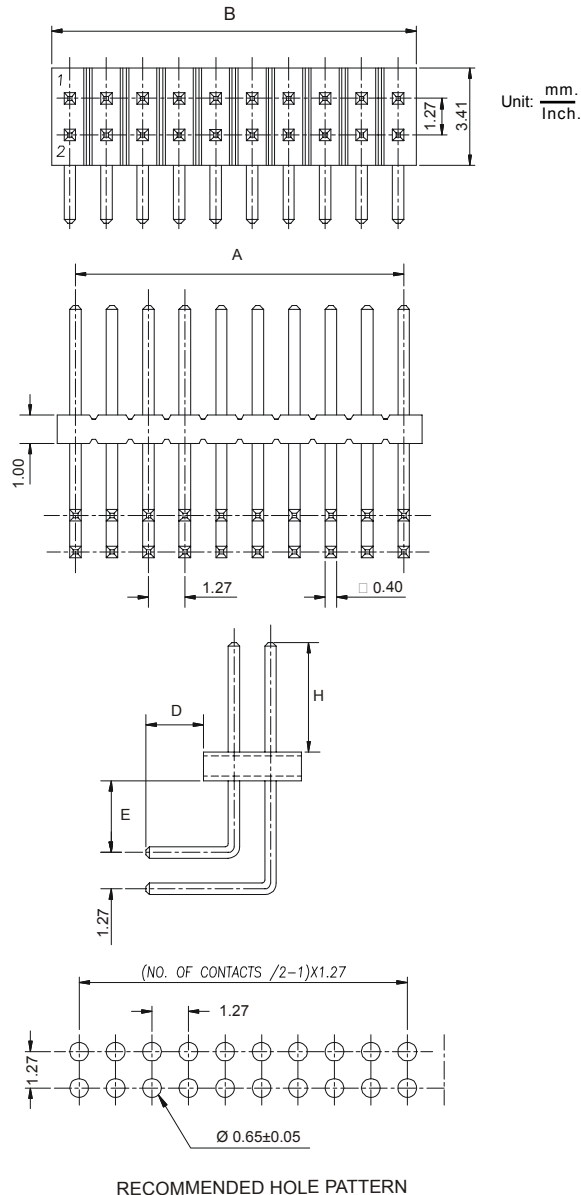

Ordering and Dimensional Information

| Circuit size | Part Number | Dimensions | |
|--------------|-------------|--------------|--------------|
| | | A | B |
| 08 | 1367-T08C | 3,81 (0,150) | 5,08(0,200) |
| 10 | 1367-T10C | 5,08(0,200) | 6,35(0,250) |
| 12 | 1367-T12C | 6,35(0,250) | 7,62(0,300) |
| 14 | 1367-T14C | 7,62(0,300) | 8,89(0,350) |
| 16 | 1367-T16C | 8,89(0,350) | 10,16(0,400) |
| 18 | 1367-T18C | 10,16(0,400) | 11,43(0,450) |
| 20 | 1367-T20C | 11,43(0,450) | 12,70(0,500) |
| 22 | 1367-T22C | 12,70(0,500) | 13,97(0,550) |
| 24 | 1367-T24C | 13,97(0,550) | 15,24(0,600) |
| 26 | 1367-T26C | 15,24(0,600) | 16,51(0,650) |
| 28 | 1367-T28C | 16,51(0,650) | 17,78(0,700) |
| 30 | 1367-T30C | 17,78(0,700) | 19,05(0,750) |
| 32 | 1367-T32C | 19,05(0,750) | 20,32(0,800) |
| 34 | 1367-T34C | 20,32(0,800) | 21,59(0,850) |
| 36 | 1367-T36C | 21,59(0,850) | 22,86(0,900) |
| 38 | 1367-T38C | 22,86(0,900) | 24,13(0,950) |
| 40 | 1367-T40C | 24,13(0,950) | 25,40(1,000) |
| 42 | 1367-T42C | 25,40(1,000) | 26,67(1,050) |
| 44 | 1367-T44C | 26,67(1,050) | 27,94(1,100) |
| 46 | 1367-T46C | 27,94(1,100) | 29,21(1,150) |
| 48 | 1367-T48C | 29,21(1,150) | 30,48(1,200) |
| 50 | 1367-T50C | 30,48(1,200) | 31,75(1,250) |
| 52 | 1367-T52C | 31,75(1,250) | 33,02(1,300) |
| 54 | 1367-T54C | 33,02(1,300) | 34,29(1,350) |
| 56 | 1367-T56C | 34,29(1,350) | 35,56(1,400) |
| 58 | 1367-T58C | 35,56(1,400) | 36,83(1,450) |
| 60 | 1367-T60C | 36,83(1,450) | 38,10(1,500) |
| 62 | 1367-T62C | 38,10(1,500) | 39,37(1,550) |
| 64 | 1367-T64C | 39,37(1,550) | 40,64(1,600) |
| 66 | 1367-T66C | 40,64(1,600) | 41,91(1,650) |
| 68 | 1367-T68C | 41,91(1,650) | 43,18(1,700) |
| 70 | 1367-T70C | 43,18(1,700) | 44,45(1,750) |
| 72 | 1367-T72C | 44,45(1,750) | 45,72(1,800) |
| 74 | 1367-T74C | 45,72(1,800) | 46,99(1,850) |
| 76 | 1367-T76C | 46,99(1,850) | 48,26(1,900) |
| 78 | 1367-T78C | 48,26(1,900) | 49,53(1,950) |
| 80 | 1367-T80C | 49,53(1,950) | 50,80(2,000) |
| 82 | 1367-T82C | 50,80(2,000) | 52,07(2,050) |
| 84 | 1367-T84C | 52,07(2,050) | 53,34(2,100) |
| 86 | 1367-T86C | 53,34(2,100) | 54,61(2,150) |
| 88 | 1367-T88C | 54,61(2,150) | 55,88(2,200) |
| 90 | 1367-T90C | 55,88(2,200) | 57,15(2,250) |
| 92 | 1367-T92C | 57,15(2,250) | 58,42(2,300) |
| 94 | 1367-T94C | 58,42(2,300) | 59,69(2,350) |
| 96 | 1367-T96C | 59,69(2,350) | 60,96(2,400) |
| 98 | 1367-T98C | 60,96(2,400) | 62,23(2,450) |
| 100 | 1367-T00C | 62,23(2,450) | 63,50(2,500) |

C = Pin Length

- C = 1. H = 3.80mm; D = 2.00mm; E = 2.50mm
- C = 2. H = 3.50mm; D = 3.10mm; E = 0.50mm
- C = 3. H = 2.10mm; D = 3.50mm; E = 1.60mm
- C = 4. H = 4.00mm; D = 2.00mm; E = 1.00mm

T = Contact Plating

- T = 13. Selective gold flash over 50µ" nickel

Recommended Finish

- T = 14. 10µ" selective gold over 50µ" nickel
- T = 16. 30µ" selective gold over 50µ" nickel