

POLARISED SMT HEADER




2013 SERIES. 2.00mm(0.079"). For PCB Solder

Features

- Available in 2 through 16 circuits
- Insulator Material: Nylon 6T UL 94V-0
- Fully shrouded. With polarised slot
- 0.50mm(0.020") square pin in tinned brass
- Mates with 2010 series socket
- Low profile

Dimensional Information

Right Angle Version

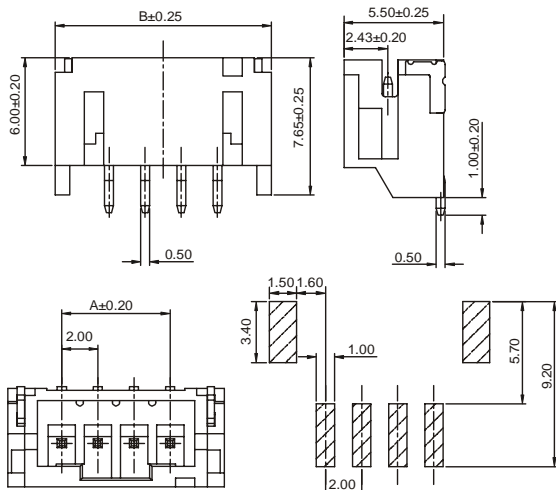

RECOMMENDED HOLE PATTERN


Ordering and Dimensional Information

Circuit Size	Part Number		Dimensions	
	Straight	Right Angle	A	B
02	2013-2020E	2013-2021E	2,00(0,079)	7,98 (0,314)
03	2013-2030E	2013-2031E	4,00(0,157)	9,98 (0,393)
04	2013-2040E	2013-2041E	6,00(0,236)	11,98 (0,471)
05	2013-2050E	2013-2051E	8,00(0,315)	13,98 (0,550)
06	2013-2060E	2013-2061E	10,00(0,394)	15,98 (0,629)
07	2013-2070E	2013-2071E	12,00(0,472)	17,98 (0,707)
08	2013-2080E	2013-2081E	14,00(0,551)	19,98 (0,786)
09	2013-2090E	2013-2091E	16,00(0,630)	21,98 (0,865)
10	2013-2100E	2013-2101E	18,00(0,709)	23,98 (0,944)
11	2013-2110E	2013-2111E	20,00(0,787)	25,98 (1,022)
12	2013-2120E	2013-2121E	22,00(0,866)	27,98 (1,101)
13	2013-2130E	2013-2131E	24,00(0,945)	29,98 (1,180)
14	2013-2140E	2013-2141E	26,00(1,024)	31,98 (1,259)
15	2013-2150E	2013-2151E	28,00(1,102)	33,98 (1,337)
16	2013-2160E	2013-2161E	30,00(1,102)	35,98 (1,416)

E = Packing Options

- E = 2. Reel + Pad

Straight Version

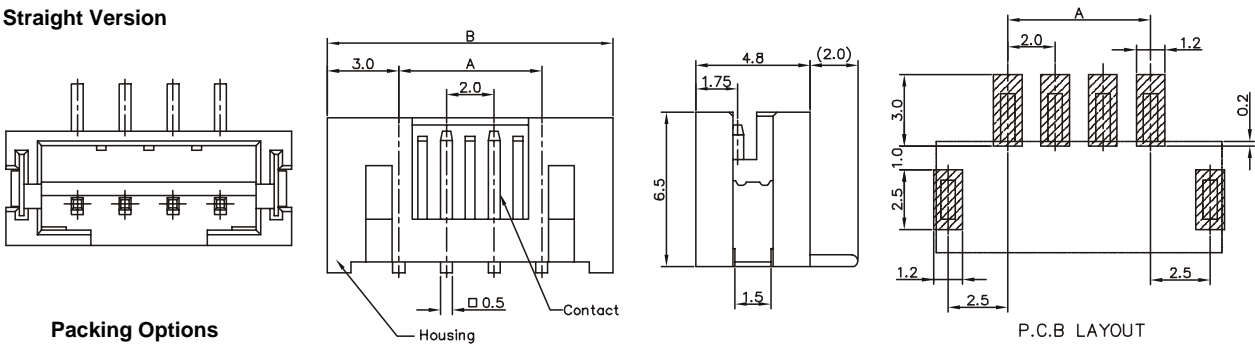

Packing Options

