

2.00mm DUAL ROW STRAIGHT HEADER





2031 SERIES. 2.00mm(0.079"). For PCB Solder


Features

- Available in 6 through 60 circuits
- Mates with 2.00mm(.079") dual row housing and socket
- Different pin length and plating options are available
- Insulator Material: Polyester UL 94V-0.
- 0.50mm square pin in copper alloy
- Easy breakaway to desired circuits
- For other options consult the Sales Office

Dimensional Information

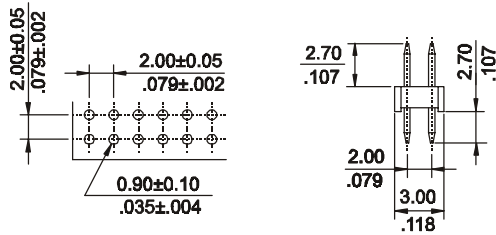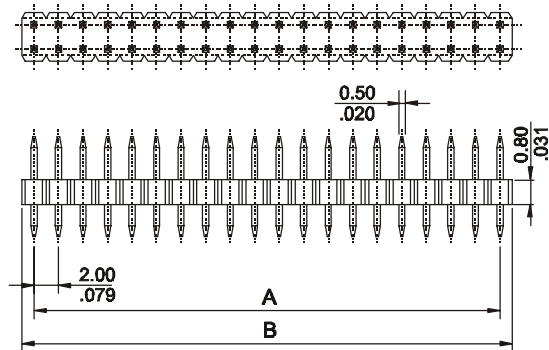

RECOMMENDED HOLE PATTERN

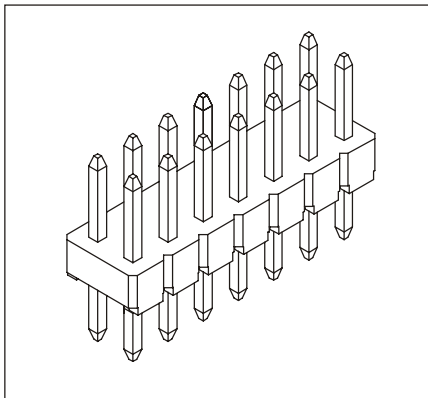

Ordering and Dimensional Information

Unit: $\frac{\text{mm.}}{\text{Inch.}}$

Circuit Size	Part Number	Dimensions	
		A	B
06	2031-T061	4,00(0,157)	6,00(0,236)
08	2031-T081	6,00(0,236)	8,00(0,315)
10	2031-T101	8,00(0,315)	10,00(0,394)
12	2031-T121	10,00(0,394)	12,00(0,472)
14	2031-T141	12,00(0,472)	14,00(0,551)
16	2031-T161	14,00(0,551)	16,00(0,630)
18	2031-T181	16,00(0,630)	18,00(0,709)
20	2031-T201	18,00(0,709)	20,00(0,787)
22	2031-T221	20,00(0,787)	22,00(0,866)
24	2031-T241	22,00(0,866)	24,00(0,945)
26	2031-T261	24,00(0,945)	26,00(1,024)
28	2031-T281	26,00(1,024)	28,00(1,102)
30	2031-T301	28,00(1,102)	30,00(1,181)
32	2031-T321	30,00(1,181)	32,00(1,260)
34	2031-T341	32,00(1,260)	34,00(1,339)
36	2031-T361	34,00(1,339)	36,00(1,417)
38	2031-T381	36,00(1,417)	38,00(1,496)
40	2031-T401	38,00(1,496)	40,00(1,575)
42	2031-T421	40,00(1,575)	42,00(1,654)
44	2031-T441	42,00(1,654)	44,00(1,732)
46	2031-T461	44,00(1,732)	46,00(1,811)
48	2031-T481	46,00(1,811)	48,00(1,890)
50	2031-T501	48,00(1,890)	50,00(1,969)
52	2031-T521	50,00(1,969)	52,00(2,047)
54	2031-T541	52,00(2,047)	54,00(2,126)
56	2031-T561	54,00(2,126)	56,00(2,205)
58	2031-T581	56,00(2,205)	58,00(2,283)
60	2031-T601	58,00(2,283)	60,00(2,362)

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50μ" nickel
Recommended Finish
- T = 5. 15μ" gold over 50μ" nickel
- T = 6. 30μ" gold over 50μ" nickel