

WIRE TRAP CONNECTOR





2055 SERIES. 2.50 mm. (0.098"). Connector


Features

- Available in 2 through 15 circuits
- Insulator Material: Glass filled Polyester UL 94V-0
- Contact: Phosphor bronze
- Mates with AWG 24 top coated or solid conductor
- Low profile
- Applicable PC board thickness: 1.6 mm.

Dimensional Information

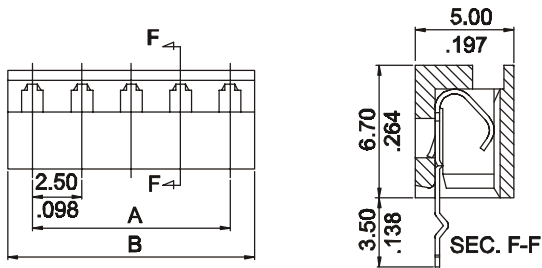

RECOMMENDED HOLE PATTERN



Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
02	2055-2021	2,50(0,098)	5,00(0,197)
03	2055-2031	5,00(0,197)	7,50(0,295)
04	2055-2041	7,50(0,295)	10,00(0,394)
05	2055-2051	10,00(0,394)	12,50(0,492)
06	2055-2061	12,50(0,492)	15,00(0,591)
07	2055-2071	15,00(0,591)	17,50(0,689)
08	2055-2081	17,50(0,689)	20,00(0,787)
09	2055-2091	20,00(0,787)	22,50(0,886)
10	2055-2101	22,50(0,886)	25,00(0,984)
11	2055-2111	25,00(0,984)	27,50(1,083)
12	2055-2121	27,50(1,083)	30,00(1,181)
13	2055-2131	30,00(1,181)	32,50(1,280)
14	2055-2141	32,50(1,280)	35,00(1,378)
15	2055-2151	35,00(1,378)	37,50(1,476)