

# FEMALE HEADER FOR FLAT CABLE




## 2070 SERIES. 2.00 x 2.00 mm. (0.079 x 0.079"). Insulator displacement

### Features


- Available in 6, 8, 10, 12, 14, 16, 20, 22, 24, 26, 30, 34, 40, 44, 50 and 68 circuits
- Mates with 2071, 2072 and 2073 male connectors
- Insulator material: PBT UL 94V-0
- Phosphor bronze Terminal with different plating options
- Accepts 9100 serie 1.00 mm flat ribbon cable
- Available different polarising models

### Dimensional information:

### Ordering and dimensional information:

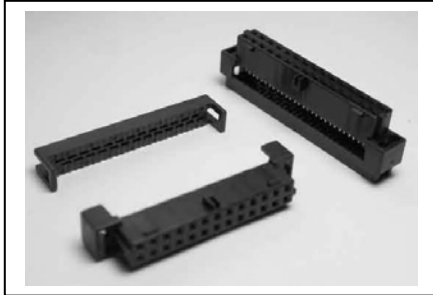

Circuit Size	Part Number	Dimensions				
		A	B	C	D	E
6	2070-T06F	12.65 (0.498)	7.65 (0.301)	6.55 (0.258)	4.00 (0.157)	10.90 (0.429)
8	2070-T08F	14.65 (0.576)	9.65 (0.380)	8.55 (0.337)	6.00 (0.236)	12.90 (0.508)
10	2070-T10F	16.65 (0.655)	11.65 (0.458)	10.55 (0.415)	8.00 (0.315)	14.90 (0.586)
12	2070-T12F	18.65 (0.734)	13.65 (0.537)	12.55 (0.494)	10.00 (0.393)	16.90 (0.665)
14	2070-T14F	20.65 (0.813)	15.65 (0.616)	14.55 (0.573)	12.00 (0.472)	18.90 (0.744)
16	2070-T16F	22.65 (0.892)	17.65 (0.695)	16.55 (0.651)	14.00 (0.551)	20.90 (0.822)
20	2070-T20F	26.65 (1.049)	21.65 (0.852)	20.55 (0.809)	18.00 (0.708)	24.90 (0.980)
22	2070-T22F	28.65 (1.128)	23.65 (0.931)	22.55 (0.888)	20.00 (0.787)	26.90 (1.059)
24	2070-T24F	30.65 (1.206)	25.65 (1.010)	24.55 (0.966)	22.00 (0.866)	28.90 (1.138)
26	2070-T26F	32.65 (1.285)	27.65 (1.088)	26.55 (1.045)	24.00 (0.945)	30.90 (1.216)
30	2070-T30F	36.65 (1.442)	31.65 (1.246)	30.55 (1.202)	28.00 (1.102)	34.90 (1.374)
34	2070-T34F	40.65 (1.600)	35.65 (1.403)	34.55 (1.360)	32.00 (1.260)	38.90 (1.531)
40	2070-T40F	46.65 (1.836)	41.65 (1.640)	40.55 (1.596)	38.00 (1.496)	44.90 (1.768)
44	2070-T44F	50.65 (1.994)	45.65 (1.797)	44.55 (1.754)	42.00 (1.653)	48.90 (1.925)
50	2070-T50F	56.65 (2.230)	51.65 (2.033)	50.55 (1.990)	48.00 (1.889)	54.90 (2.161)
68	2070-T68F	74.65 (2.939)	69.65 (2.742)	68.55 (2.699)	66.00 (2.598)	72.90 (2.870)

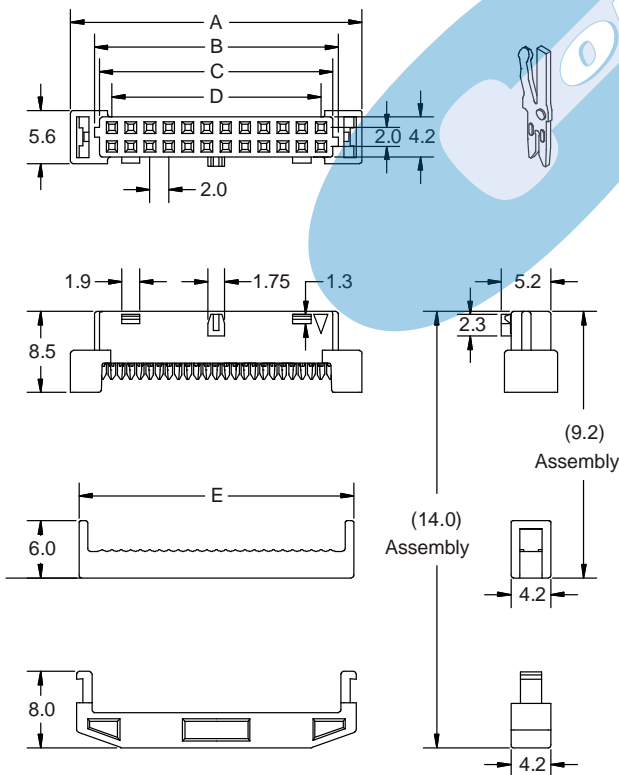

### T = Contact Plating

- T = 2. Tin plated
  - T = 3. Gold flash over 50µ" nickel
- Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
  - T = 6. 30µ" gold over 50µ" nickel

### F = Fixing System

- F = 1. With bar and ramp locking
- F = 2. With bar only
- F = 3. Without bar / ramp feature
- F = 4. Single ramp locking only

