

SINGLE ROW FEMALE HEADER






2101. SERIES. 2.54mm(0.100"). For PCB Solder

Features

- Available in 2 through 40 circuits
- Insulator Material: PBT UL 94V-0
- Mates with 2.54mm pitch and 0.64mm square or round pin header
- Profile: 8.50mm
- Low profile and High density is suitable for devices which require small and light internal parts
- High reliability contact structure provides normal insertion force after repeated cycles
- For other options consult the Sales Office

Dimensional information

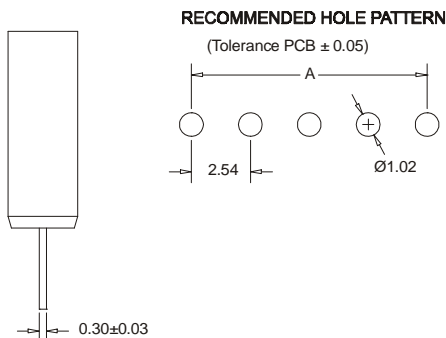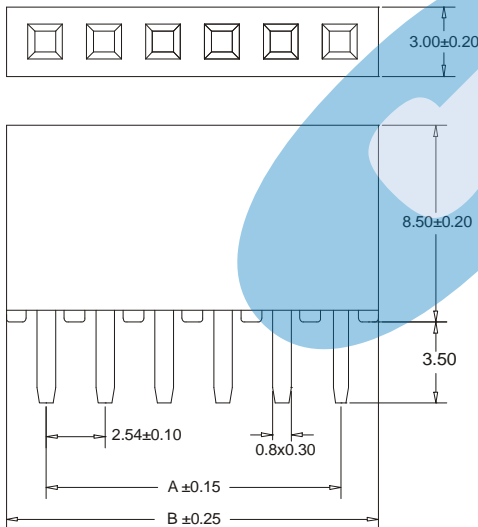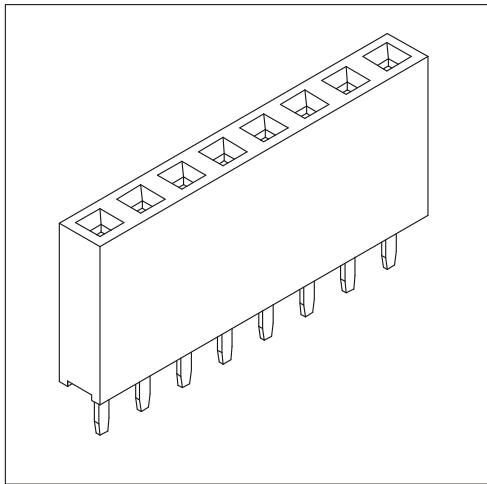

Ordering and dimensional information

Circuit Size	Part Number	Dimensions	
		A	B
02	2101 - T021	2.54(0.100)	5.88(0.231)
03	2101 - T031	5.08(0.200)	8.42(0.331)
04	2101 - T041	7.62(0.300)	10.96(0.431)
05	2101 - T051	10.16(0.400)	13.50(0.531)
06	2101 - T061	12.70(0.500)	16.04(0.631)
07	2101 - T071	15.24(0.600)	18.58(0.731)
08	2101 - T081	17.78(0.700)	21.12(0.831)
09	2101 - T091	20.32(0.800)	23.66(0.931)
10	2101 - T101	22.86(0.900)	26.20(1.031)
11	2101 - T111	25.40(1.000)	28.74(1.131)
12	2101 - T121	27.94(1.100)	31.28(1.231)
13	2101 - T131	30.48(1.200)	33.82(1.331)
14	2101 - T141	33.02(1.300)	36.36(1.431)
15	2101 - T151	35.56(1.400)	38.90(1.531)
16	2101 - T161	38.10(1.500)	41.44(1.631)
17	2101 - T171	40.64(1.600)	43.98(1.731)
18	2101 - T181	43.18(1.700)	46.52(1.831)
19	2101 - T191	45.72(1.800)	49.06(1.931)
20	2101 - T201	48.26(1.900)	51.60(2.031)
21	2101 - T211	50.80(2.000)	54.14(2.131)
22	2101 - T221	53.34(2.100)	56.68(2.231)
23	2101 - T231	55.88(2.200)	59.22(2.331)
24	2101 - T241	58.42(2.300)	61.76(2.431)
25	2101 - T251	60.96(2.400)	64.30(2.531)
26	2101 - T261	63.50(2.500)	66.84(2.631)
27	2101 - T271	66.04(2.600)	69.38(2.731)
28	2101 - T281	68.58(2.700)	71.92(2.831)
29	2101 - T291	71.12(2.800)	74.46(2.931)
30	2101 - T301	73.66(2.900)	77.00(3.031)
31	2101 - T311	76.20(3.000)	79.54(3.131)
32	2101 - T321	78.74(3.100)	82.08(3.231)
33	2101 - T331	81.28(3.200)	84.62(3.331)
34	2101 - T341	83.82(3.300)	87.16(3.431)
35	2101 - T351	86.36(3.400)	89.70(3.531)
36	2101 - T361	88.90(3.500)	92.24(3.631)
37	2101 - T371	91.44(3.600)	94.78(3.731)
38	2101 - T381	93.98(3.700)	97.32(3.831)
39	2101 - T391	96.52(3.800)	99.86(3.931)
40	2101 - T401	99.06(3.900)	102.40(4.031)

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel
Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel
- T = 13. Selective gold flash over 50µ" nickel
- T = 15. 15µ" selective gold over 50µ" nickel
- T = 16. 30µ" selective gold over 50µ" nickel