

5.08mm SINGLE ROW BREAKAWAY HEADER




5086 SERIES. 5.08mm(0.200"). Round Pin. For PCB Solder

Features

- Available in 1 through 20 circuits
- Insulator Material: Nylon 6/6 UL 94V-0
- 1.14mm(.045") round pin in tinned brass
- Easy breakaway to desired circuits
- Mates with 5080, 5081, 1507, 1508 and 1509 series headers
- With standoff minimise flux retention
- Pin omit options are available in any circuits

Dimensional Information

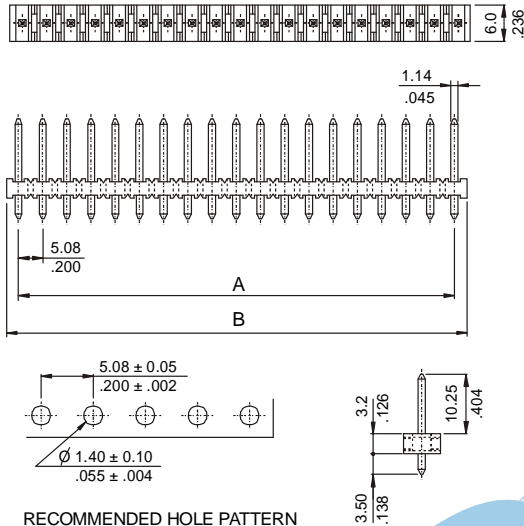

Ordering and Dimensional Information

| Circuit Size | Part Number | Dimensions | |
|--------------|-------------|--------------|---------------|
| | | A | B |
| 01 | 5086-2011 | - | 5.00 (0.196) |
| 02 | 5086-2021 | 5,08(0,200) | 10,16(0,400) |
| 03 | 5086-2031 | 10,16(0,400) | 15,24(0,600) |
| 04 | 5086-2041 | 15,24(0,600) | 20,32(0,800) |
| 05 | 5086-2051 | 20,32(0,800) | 25,40(1,000) |
| 06 | 5086-2061 | 25,40(1,000) | 30,48(1,200) |
| 07 | 5086-2071 | 30,48(1,200) | 35,56(1,400) |
| 08 | 5086-2081 | 35,56(1,400) | 40,64(1,600) |
| 09 | 5086-2091 | 40,64(1,600) | 45,72(1,800) |
| 10 | 5086-2101 | 45,72(1,800) | 50,80(2,000) |
| 11 | 5086-2111 | 50,80(2,000) | 55,88(2,200) |
| 12 | 5086-2121 | 55,88(2,200) | 60,96(2,400) |
| 13 | 5086-2131 | 60,96(2,400) | 66,04(2,600) |
| 14 | 5086-2141 | 66,04(2,600) | 71,12(2,800) |
| 15 | 5086-2151 | 71,12(2,800) | 76,20(3,000) |
| 16 | 5086-2161 | 76,20(3,000) | 81,28(3,200) |
| 17 | 5086-2171 | 81,28(3,200) | 86,36(3,400) |
| 18 | 5086-2181 | 86,36(3,400) | 91,44(3,600) |
| 19 | 5086-2191 | 91,44(3,600) | 96,52(3,800) |
| 20 | 5086-2201 | 96,52(3,800) | 101,60(4,000) |

