

# MALE COMPACT FLASH CONECTOR



## 5500 SERIES. 1.27 mm. (0.050"). For PCB solder


### Features

- Available in 50 circuits
- Plating: 5µ" Gold on contact area and Tin plated in Solder area
- Housing: LCP, UL 94V-0
- Voltage Current Rating: 0.5 A
- Insulation Resistance: 1.000 MΩ minimum
- Dielectric Withstanding Voltage: 500 Vrms

### Dimensional Information

### Ordering and Dimensional Information

**SERIES: 5500 - 14500**

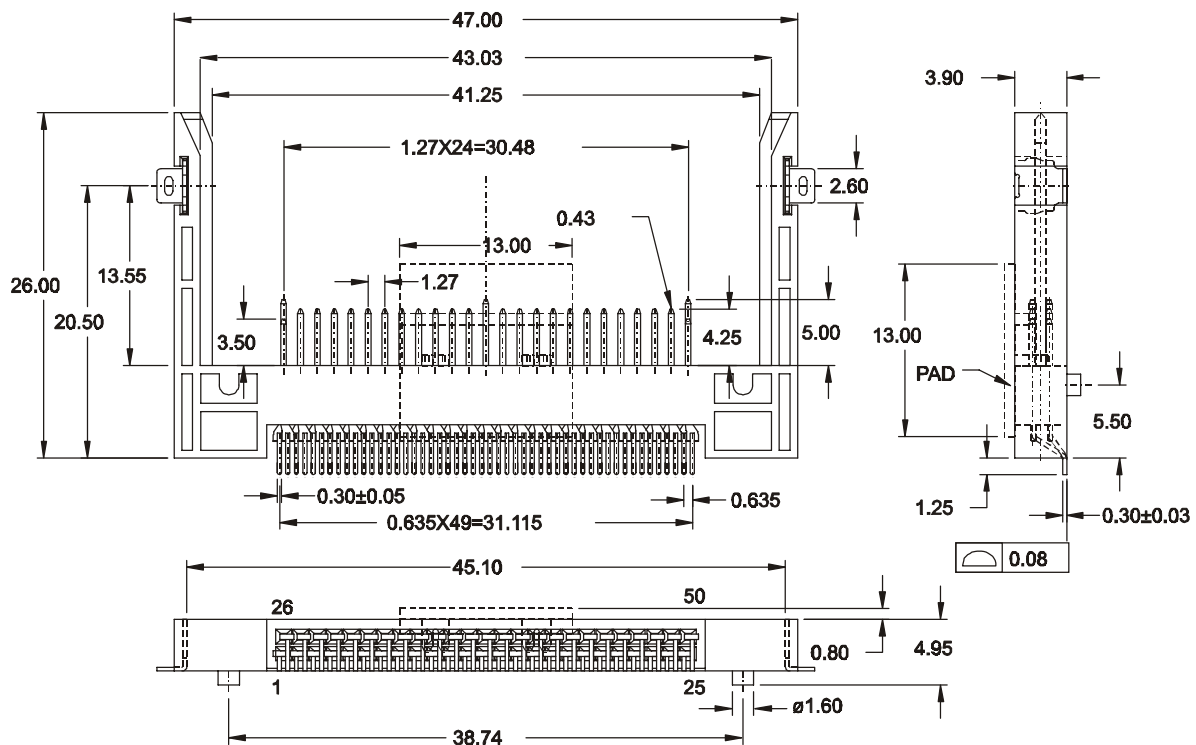

Pin Dimension	
Pin Number	Dimension
25, 26	3.50 mm.
1, 13, 38, 50	5.00 mm
All other pins	4.25 mm.

