

6.35mm POWER STRAIGHT HEADER



6767 SERIES. 6.35mm (0.250"). For High Current / High Density

Features


- Available in 2, 3, 4, 5, 6, 7, 8, 9, 10, 12 and 15 circuits
- Insulator Material: UL94V-2 and UL94V-0
- Contact Material: Brass
- Mates with 6760 series housing
- Available with or without polarising feature
- Positive lock

Dimensional Information

Ordering and Dimensional Information

Circuit Size	Part Number (UL V-2)		Part Number (UL V-0)		Dimensions	
	W/O Polarising	With Polarising	W/O Polarising	With Polarising	A	B
2	6767 - 2020	6767 - 2021	6767 - 2022	6767 - 2023	13.97 (0.550)	7.62 (0.300)
3	6767 - 2030	6767 - 2031	6767 - 2032	6767 - 2033	20.32 (0.800)	7.62 (0.300)
4	6767 - 2040	6767 - 2041	6767 - 2042	6767 - 2043	26.67 (1.050)	7.62 (0.300)
5	6767 - 2050	6767 - 2051	6767 - 2052	6767 - 2053	33.02 (1.300)	7.62 (0.300)
6	6767 - 2060	6767 - 2061	6767 - 2062	6767 - 2063	39.37 (1.550)	7.62 (0.300)
6*	6767 - 2065	6767 - 2066	6767 - 2067	6767 - 2068	13.97 (0.550)	20.32 (0.800)
7	6767 - 2070	6767 - 2071	6767 - 2072	6767 - 2073	45.72 (1.800)	7.62 (0.300)
8	6767 - 2080	6767 - 2081	6767 - 2082	6767 - 2083	52.07 (2.05)	7.62 (0.300)
9	6767 - 2090	6767 - 2091	6767 - 2092	6767 - 2093	23.00 (0.905)	7.62 (0.300)
9*	6767 - 2095	6767 - 2096	6767 - 2097	6767 - 2098	20.32 (0.800)	20.32 (0.800)
10	6767 - 2100	6767 - 2101	6767 - 2102	6767 - 2103	64.77 (2.55)	7.62 (0.300)
12	6767 - 2120	6767 - 2121	6767 - 2122	6767 - 2123	26.67 (1.050)	20.32 (0.800)
15	6767 - 2150	6767 - 2151	6767 - 2152	6767 - 2153	33.02 (1.300)	20.32 (0.800)

(*) Square distribution contacts

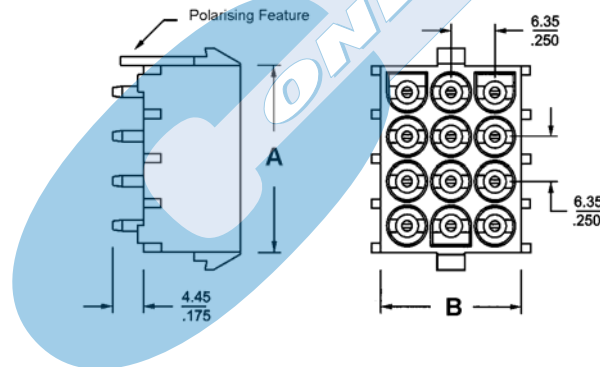

RECOMMENDED HOLE PATTERN

