

TOP ENTRY PCB JACK FCC-68



6811 SERIES For PCB Solder


Features

- Available in 4/4, 6/4, 6/6, 8/6 and 8/8 circuits
- Mates with FCC-68 modular plugs
- Insulator Material: Thermoplast; UL 94V-0
- With and without panel stop
- Contacts: round wire 0.46 mm diameter
- Material: phosphor bronze, gold plated in diff. options
- Insulation Resistance: 500 Megaohm min.
- Dielectrical Resistance: 1000 VDC 60 Hz/1 min.

Dimensional Information



Ordering and Dimensional Information

VERSION	Part Number		DIMENSIONS			
	w/o panel stop	with panel stop	A	B	C	D
4/4	6811 - T440	6811 - T441	13.97 (0.550)	11.43 (0.450)	7.62 (0.300)	3.81 (0.150)
6/4	6811 - T640	6811 - T641	15.75 (0.620)	13.46 (0.530)	10.16 (0.400)	3.81 (0.150)
6/6	6811 - T660	6811 - T661	15.75 (0.620)	13.46 (0.530)	10.16 (0.400)	6.35 (0.250)
8/6	6811 - T860	6811 - T861	17.84 (0.703)	15.36 (0.605)	11.43 (0.465)	6.35 (0.250)
8/8	6811 - T880	6811 - T881	17.84 (0.703)	15.36 (0.605)	11.43 (0.465)	8.89 (0.350)

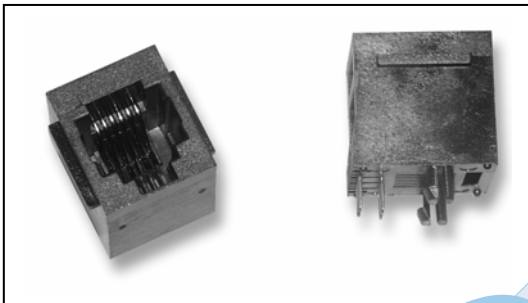

T = Pin Plating Options

- T = 4. 0.15 μ Gold over 1.27 μ Ni.
- T = 5. 0.38 μ Gold over 1.27 μ Ni.
- T = 6. 0.75 μ Gold over 1.27 μ Ni.
- T = 7. 1.27 μ Gold over 1.27 μ Ni.

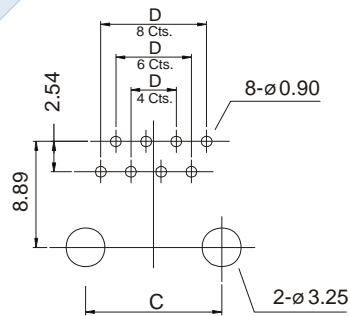

MECANIZADO RECOMENDADO

