

7.50/5.00mm STRAIGHT HEADER




7517 SERIES. 7.50–5.00mm(0.295" – 0.197"). For PCB Solder

Features

- Available in 2 through 15 circuits
- Different pin length and plating options are available
- Insulator Material: Nylon 6/6 UL 94V-2
- 1.14mm(.045") square pin in tinned brass
- Mates with 7500 series socket

Dimensional Information

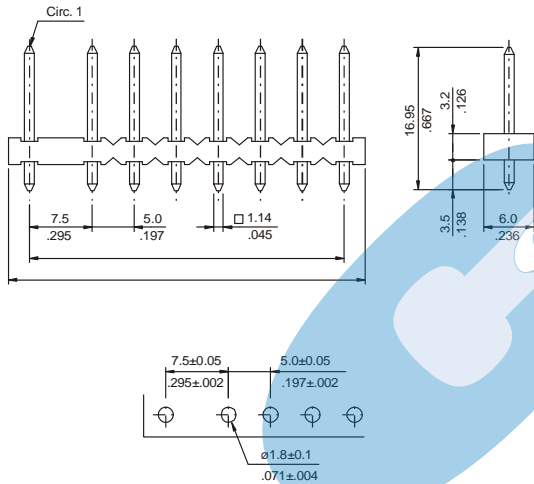

RECOMMENDED HOLE PATTERN

Ordering and Dimensional Information

| Circuit Size | Part Number | Dimensions | |
|--------------|------------------|--------------|---------------|
| | | A | B |
| 02 | 7517-2021 | 7,50(0,295) | 12,50(0,492) |
| 03 | 7517-2031 | 12,50(0,492) | 17,50(0,689) |
| 04 | 7517-2041 | 17,50(0,689) | 22,50(0,886) |
| 05 | 7517-2051 | 22,50(0,886) | 27,50(1,083) |
| 06 | 7517-2061 | 27,50(1,083) | 32,50(1,280) |
| 07 | 7517-2071 | 32,50(1,280) | 37,50(1,476) |
| 08 | 7517-2081 | 37,50(1,476) | 42,50(1,673) |
| 09 | 7517-2091 | 42,50(1,673) | 47,50(1,870) |
| 10 | 7517-2101 | 47,50(1,870) | 52,50(2,067) |
| 11 | 7517-2111 | 52,50(2,067) | 57,50(2,264) |
| 12 | 7517-2121 | 57,50(2,264) | 62,50(2,461) |
| 13 | 7517-2131 | 62,50(2,461) | 67,50(2,657) |
| 14 | 7517-2141 | 67,50(2,657) | 72,50(2,854) |
| 15 | 7517-2151 | 72,50(2,854) | 77,50 (3,051) |