

LOW PROFILE PCB JACK




7649 SERIES. For PCB solder. Side Entry, Shielded, SMT Type Jack

Features

- Available in 8/8 and 10/10 circuits
- Insulator Material: Glass filled polyester UL 94V-0
- Contacts: Golden phosphor bronze of 0.35 X 0.45 mm.
- Shielded Material: Bronze with nickel plated
- Gold plating over nickel in Contact Area.
- Tin plating over nickel in Solder Area
- Mates with FCC-68 modular plugs
- Low profile (11.75 mm.)

Dimensional Information


Ordering and Dimensional Information

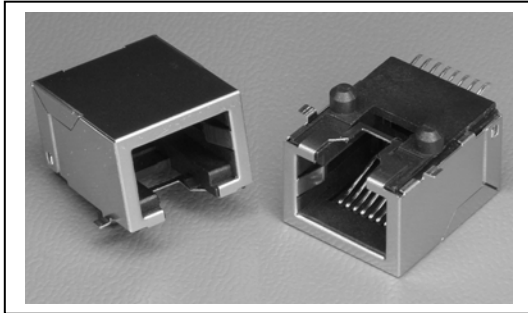

| Circuit Size | Part Number |
|--------------|-------------|
| 8/8 | 7649 – T881 |
| 10/10 | 7649 – T101 |

T = Contact Plating

- T = 4.6 μ " gold over 50 μ " nickel
- T = 5.15 μ " gold over 50 μ " nickel
- T = 6.30 μ " gold over 50 μ " nickel
- T = 7.50 μ " gold over 50 μ " nickel



RECOMMENDED PCB LAYOUT

