

MULTI-PORT PCB JACK DOUBLE LEVEL



7655 SERIES. For PCB Solder. Side Entry Without Shielded.

Features


- Available in 6/6 and 8/8 circuits
- Available in 2, 4, 8, 12 and 16 Ports
- Insulator Material: Glass filled polyester UL 94V-0
- Contacts: Golden phosphor bronze of 0.35mm
- Different plating options are available
- Shielded Material: Bronze with nickel plated
- Gold plating over nickel in Contact Area
- Tin plating over nickel in Solder Area
- Mates with FCC-68 modular plugs
- With fixing post according to versions

Ordering and Dimensional Information


| Ports | Part Number | |
|-------|-------------|-------------|
| | 8/8 | 6/6 |
| 2 | 7655 - T021 | 7655 - T022 |
| 4 | 7655 - T041 | 7655 - T042 |
| 8 | 7655 - T081 | 7655 - T082 |
| 12 | 7655 - T121 | 7655 - T122 |
| 16 | 7655 - T161 | 7655 - T162 |

T = Contact Plating

- T = 4. 6μ" gold over 50μ" nickel
- T = 5. 15μ" gold over 50μ" nickel
- T = 6. 30μ" gold over 50μ" nickel
- T = 7. 50μ" gold over 50μ" nickel

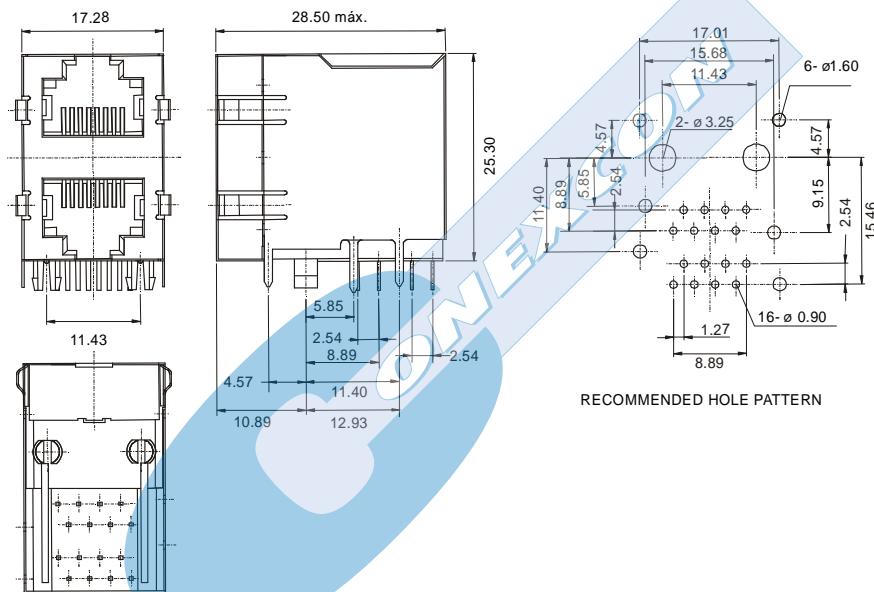

RECOMMENDED HOLE PATTERN

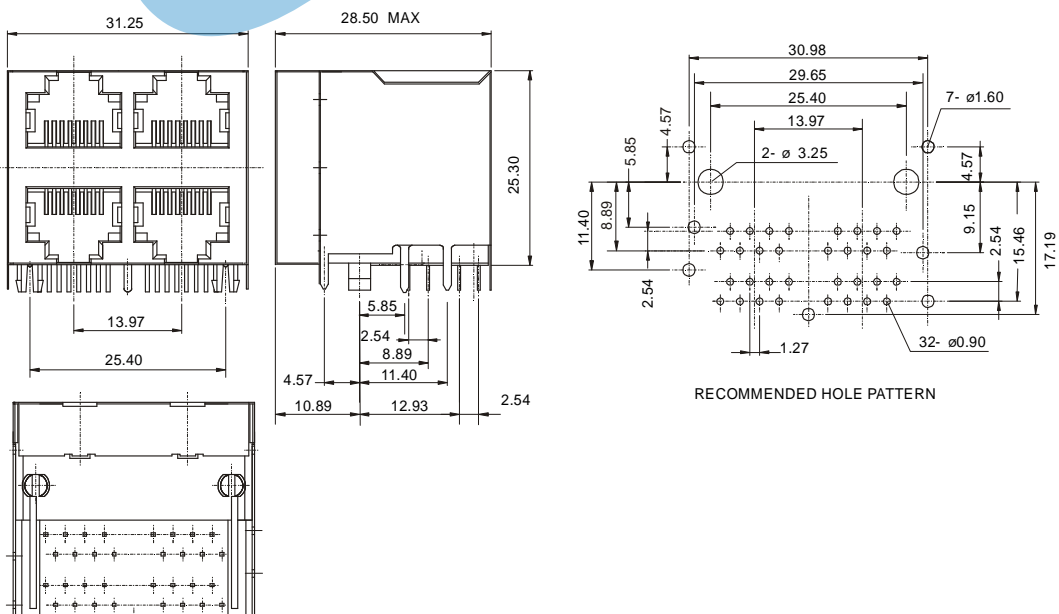





RECOMMENDED HOLE PATTERN

MULTI-PORT PCB JACK DOUBLE LEVEL



7655 SERIES. For PCB Solder. Side Entry Without Shielded.




8 and 12 Ports

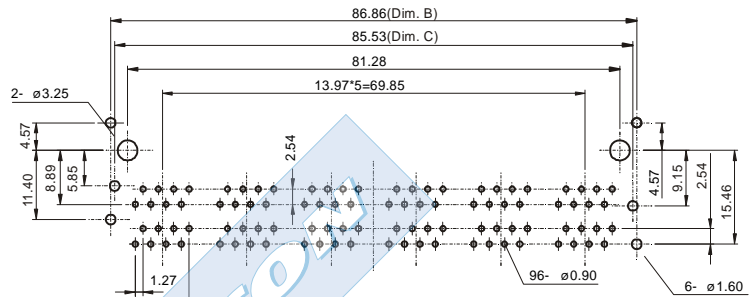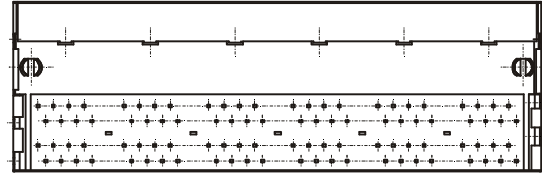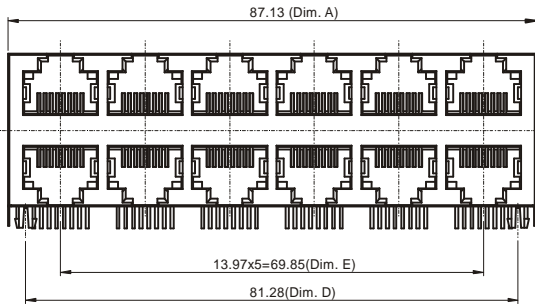

RECOMMENDED HOLE PATTERN

| Ports | Dimensions | | | | |
|-------|--------------|--------------|--------------|--------------|--------------|
| | A | B | C | D | E |
| 8 | 59.19(2.331) | 58.92(2.320) | 57.59(2.268) | 53.34(2.100) | 41.91(1.650) |
| 12 | 87.13(3.430) | 86.86(3.420) | 85.53(3.368) | 81.28(3.200) | 69.85(2.750) |

16 Ports

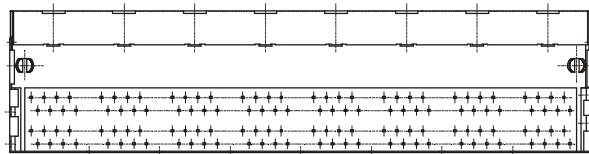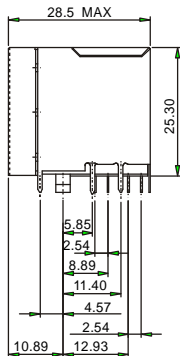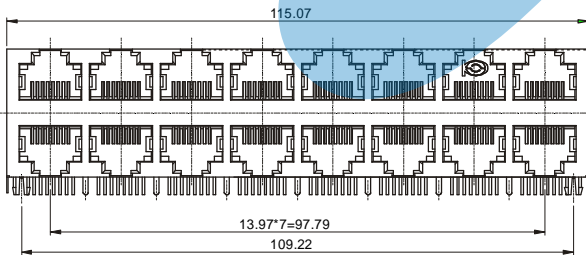

RECOMMENDED HOLE PATTERN

