

R/ ANGLE TEL. JACK FCC-68.LOW PROF. SMT




7664 SERIES. For PCB solder. For Surface Mounting.

Features

- Available in versions: 6/4, 6/6, 8/8 and 10/10
- Plastic Material: Polyester, fibre glass filled; UL 94V-0
- Contact Material: Phosphor Bronze 0.35 X 0.45 mm.
- Low Profile
- Plating of the Pins: Contact area selective Gold plated; Solder area Tin plated
- Mates with plugs FCC-68

Dimensional Information

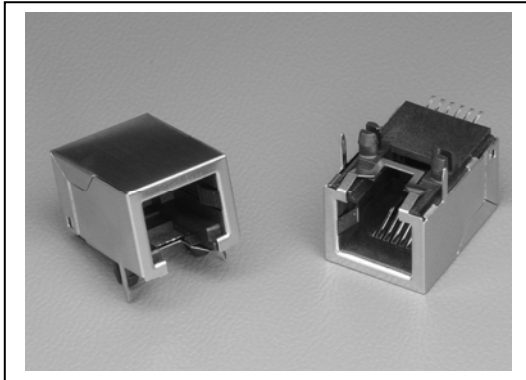


Ordering and Dimensional Information

VERSION	Part Number	DIMENSIONS			
		A	B	C	D
6/4	7664 – T641	13.56 (0.534)	10.16 (0.400)	6.35 (0.250)	13.57 (0.534)
6/6	7664 – T661	13.56 (0.534)	10.16 (0.400)	6.35 (0.250)	13.57 (0.534)
8/8	7664 – T881	15.74 (0.620)	11.43 (0.450)	8.89 (0.350)	15.54 (0.612)
10/10	7664 – T101	15.74 (0.620)	11.43 (0.450)	11.43 (0.450)	15.54 (0.612)

T = Plating of the Pins

- T = 4. 0.15 μ Gold over 1.27 μ Ni.
- T = 5. 0.38 μ Gold over 1.27 μ Ni.
- T = 6. 0.75 μ Gold over 1.27 μ Ni.
- T = 7. 1.27 μ Gold over 1.27 μ Ni.

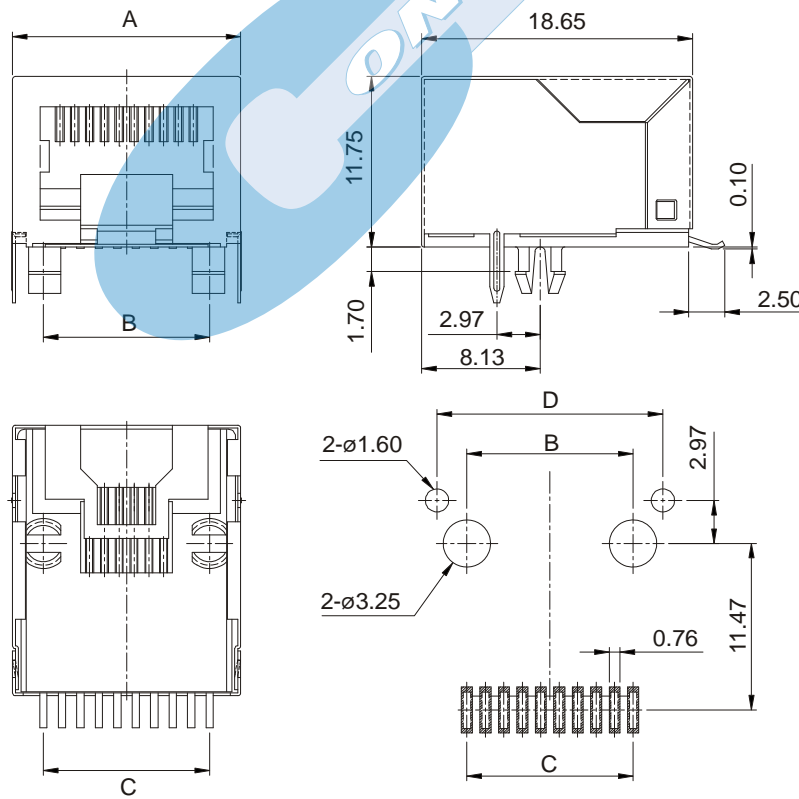

RECOMMENDED PCB LAYOUT
(Top View)