

TOP ENTRY PCB JACK FCC-68 SMT




7665 SERIES. For PCB Solder

Features

- Available in versions: 4/4, 6/4, 6/6, 8/8 and 10/10
- Material conductor: copper alloy
- Mates with plug FCC-68
- Contacts of wire 0.35 mm. thickness
- Insulator Material: Thermoplastic; UL 94V-0
- Contact in different platings available

Dimensional Information


Ordering and Dimensional Information

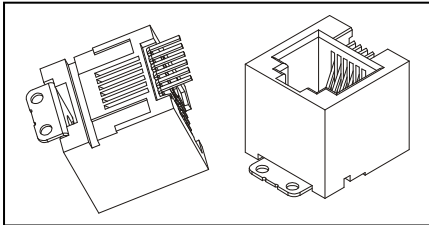

VERSION	Part Number	DIMENSIONS		
		A	B	C
4/4	7665 – T441	13.21 (0.520)	7.82 (0.307)	3.81 (0.150)
6/4	7665 – T641	13.21 (0.520)	9.85 (0.387)	6.35 (0.250)
6/6	7665 – T661	13.21 (0.520)	9.85 (0.387)	6.35 (0.250)
8/8	7665 – T881	15.50 (0.610)	11.85 (0.466)	8.89 (0.350)
10/10	7665 – T001	15.50 (0.610)	11.85 (0.466)	11.43 (0.450)

T = Platings of the Pins

- T = 4. 0.15 μ Gold over 1.27 μ Ni.
- T = 5. 0.38 μ Gold over 1.27 μ Ni.
- T = 6. 0.75 μ Gold over 1.27 μ Ni.
- T = 7. 1.27 μ Gold over 1.27 μ Ni.

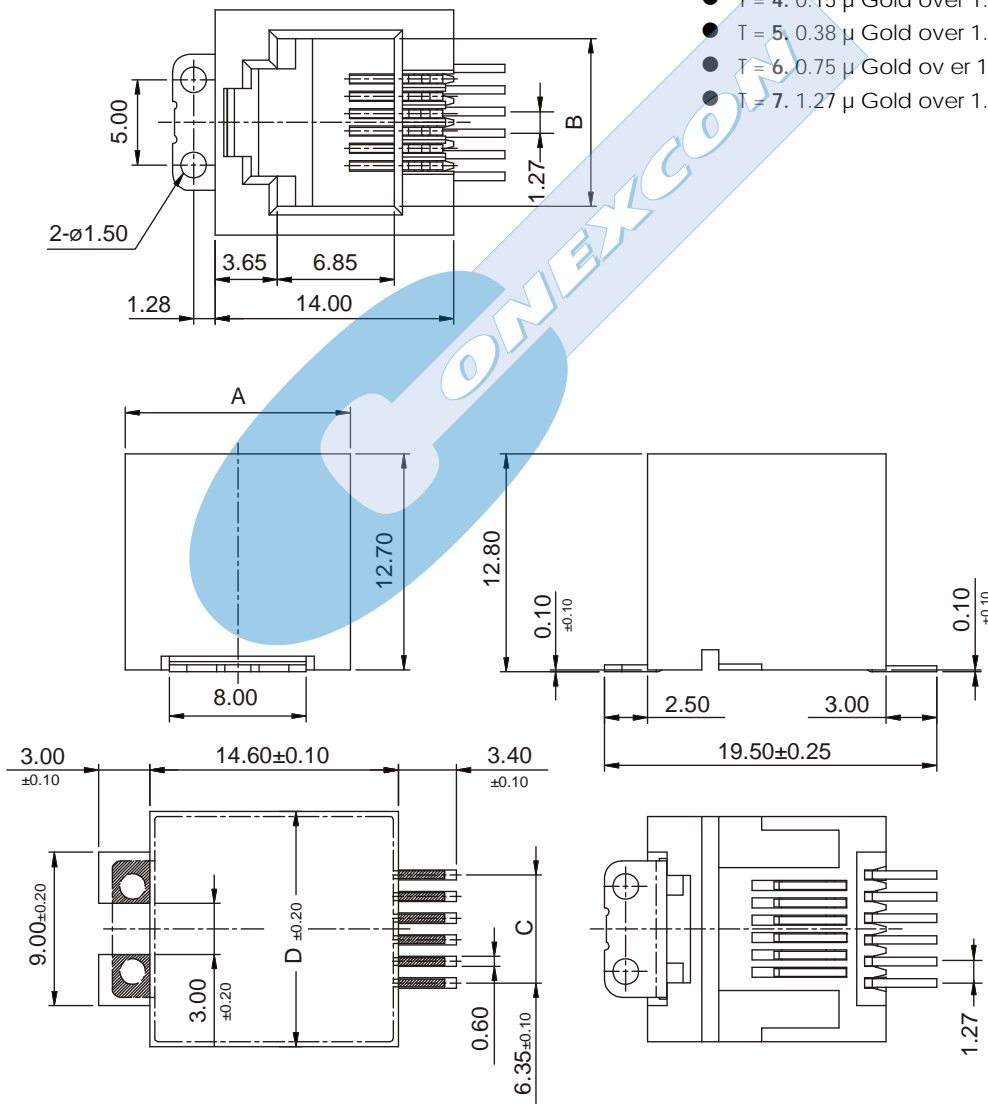

RECOMMENDED PCB LAYOUT