RIGHT ANGLE MULTI-PORT JACK WITH LED

7670 SERIES. For PCB Solder. With Shielding

Features

- Available in version: 8/8
- Available in 1, 2, 4, 6 and 8 ports
- Mates with plugs FCC-68
- Insulator Material: Thermoplastic; UL94V-0
- Shielding: shells in Brass 0.25 mm thick; nickel plated; With grounding tap to PCB
- Contact Material: Phosphor Bronze of 0.35 mm. Different plating options are available

Dimensional Information

OPTIONS	LED 1	LED 2
C = **0**	W/O LED	W/O LED
C = **1**	GRREN	YELLOW
C = **2**	GREEN	W/O LED
C = **3**	YELLOW	GREEN
C = **4**	GREEN	GREEN
C = **5**	YELLOW	YELLOW
C = **6**	YELLO/GREEN	YELLO/GREEN
C = **7**	GREEN/RED	GREEN/RED
C = **8**	YELLOW	YELLO/GREEN

Ordering and Dimensional Information

Ports	Part Number	Dimensions				
		A	B	C	D	E
1	**7670 – T01**C	16.51	-	12.70	2.54	16.26
2	**7670 – T02**C	32.26	15.75	28.45	2.67	32.00
4	**7670 – T04**C	63.16	47.25	59.94	2.67	63.50
6	**7670 – T06**C	95.26	78.75	91.45	2.67	95.02
8	**7670 – T08**C	126.76	110.25	122.94	2.67	126.51



T = Plating Options

- T = **4.** 0.15 µ" Gold over 1.27 µ Ni.
- T = **5.** 0.38 µ" Gold over 1.27 µ Ni.
- T = **6.** 0.75 µ" Gold over 1.27 µ Ni.
- T = **7.** 1.27 µ" Gold over 1.27 µ Ni.

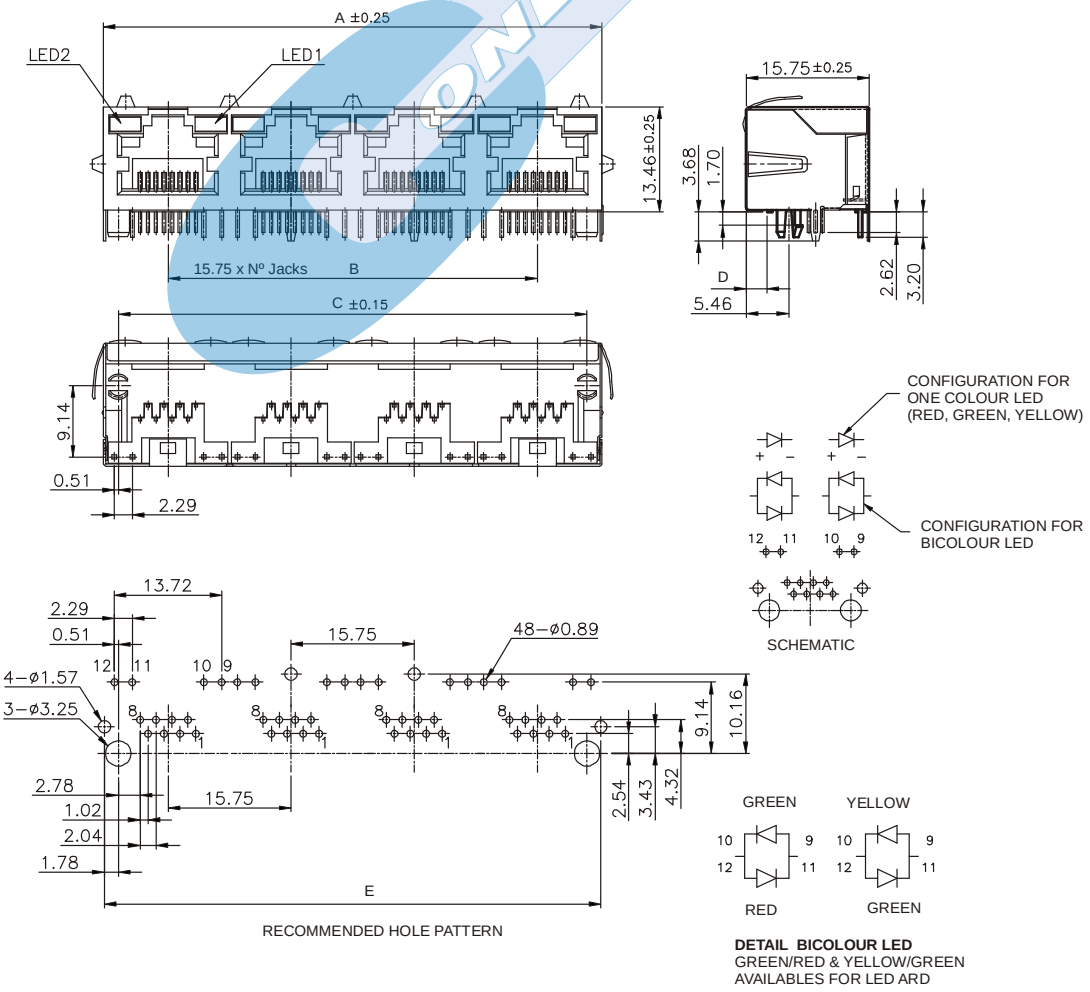

ONEXCON