

# 5.33mm RIGHT ANGLE D-SUB PLUG



## 8004 SERIES. For PCB Solder. Low Profile.



### Features

- Available in 9 circuits
- Insulator Material: Glass filled polyester UL 94V-0
- Contact Material: Brass
- Different plating options are available
- Shell: Steel, tin plated as standard
- Standard connector C = 1 (Riveted ground hooks with #4-40 UNC open
- For other options consult the Sales Office

### Dimensional Information

### Ordering

**8004 - T09C**

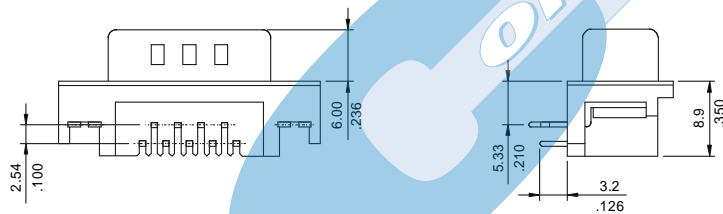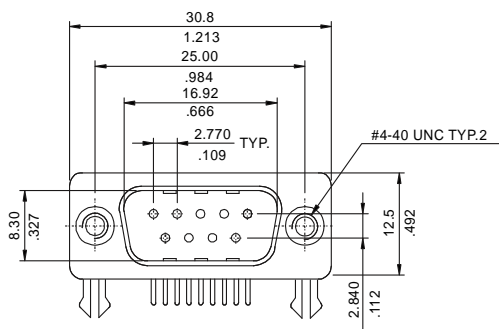


### T = Contact Plating

- T = 3. Gold flash over 50μ" nickel.
- T = 4. 10μ" gold over 50μ" nickel
- T = 5. 15μ" gold over 50μ" nickel
- T = 6. 30μ" gold over 50μ" nickel

### C = Hardware Options

- C = 1. Riveted ground hooks pre-loaded #4.40 UNC Hex screws
- C = 0. Riveted ground hooks with #4.40 UNC open

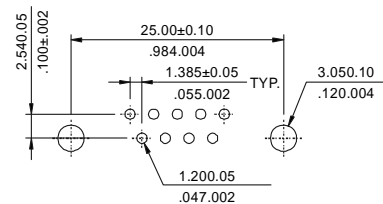

RECOMMENDED HOLE PATTERN