

3.00mm F/PRINT R/A SMT D-SUB RECEPTACLE



8136 SERIES. For PCB Solder. Low Profile

Features

- Available in 25 circuits
- Insulator Material: Glass filled polyester UL 94V-0
- Contact Material: Brass with different plating
- Shell: Steel, tin plated as standard
- Standard connector C = 1 (Riveted ground hooks with #4-40 UNC open)
- For other options consult the Sales Office

Dimensional Information

Ordering and Dimensional Information

8136 - T25C





T = Contact Plating

- T = 3. Gold flash over 50μ" nickel
- T = 4. 10μ" gold over 50μ" nickel
- T = 5. 15μ" gold over 50μ" nickel
- T = 6. 30μ" gold over 50μ" nickel

C = Hardware Options

- C = 1. Riveted ground hooks pre-loaded #4.40 UNC Hexagonal screws (standard)
- C = 0. Riveted ground hooks with #4.40 UNC open

Unit: $\frac{\text{mm.}}{\text{Inch.}}$

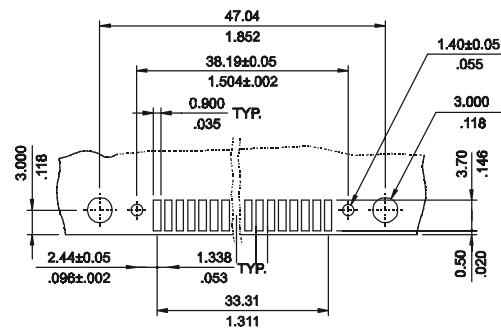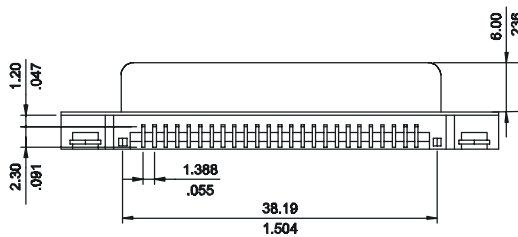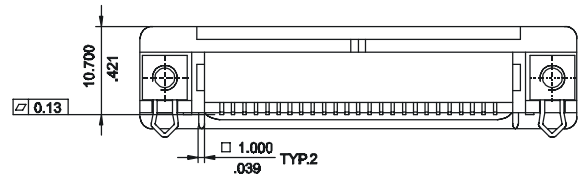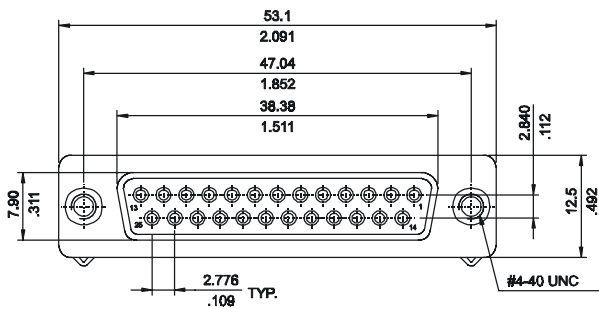

SOLDER PAD PATTERN

