

FLAT CABLE WITH SLEAVING



9130 SERIES. AWG 28 (7 x 36).

Features


- Available in 10, 14, 16, 20, 24, 26, 34, 40, 50, 60 and 64 circuits
- Insulator Material: PVC, grey colour
- Voltage rating 250 V / r. m. s.
- Available in shielded or unshielded version
- With Lateral Colour strip
- Impedance: Shielded version 73 Ω . Unshielded version 90 Ω
- Temperature range: -20°C to $+80^{\circ}\text{C}$

Dimensional Information

Ordering and Dimensional Information

Circuit Size	Part Number		Dimensions	
	Unshielded	Shielded	A	B
10	9130 - 1028	9130 - 1030	7.70	8.20
14	9130 - 1428	9130 - 1430	8.60	9.10
16	9130 - 1628	9130 - 1630	8.60	9.10
20	9130 - 2028	9130 - 2030	10.00	10.50
26	9130 - 2628	9130 - 2630	11.00	11.50
34	9130 - 3428	9130 - 3430	12.20	12.80
40	9130 - 4028	9130 - 4030	13.50	14.10
50	9130 - 5028	9130 - 5030	13.80	14.40
60	9130 - 6028	9130 - 6030	14.70	15.30
64	9130 - 6428	9130 - 6430	15.60	16.20

Unshielded

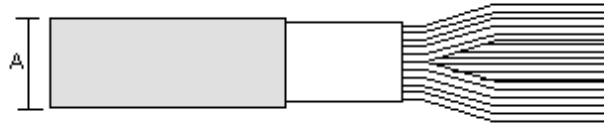

Shielded

