

FLEXIBLE MONO COLOUR FLAT CABLE




9254 SERIES. AWG 22-26. 2.54mm(0.100")

Features


- Available in 2 through 28 circuits. Insulator: PVC Grey
- UL 2651 (300V – 105°C) Flame test: VW-1
- Mat. Conductor: Over coated stranded copper tinned
- Notched cable is also available. (Consult Sales Office)
- Conductor resistance: 85.95 Ω/Km.
- Used in PCB connectors or IDC Connectors
- Insulation Resistance: 5 MΩ/min.
- Dielectric strength test: 2000 VAC/1 minute
- The colour on the first conductor:
Red strip (AWG 22) or Blue (AWG 26)
- Available: AWG 22 (7 x 0.25) or AWG 26 (7 x 0.16)

Dimensional Information

Ordering and Dimensional Information

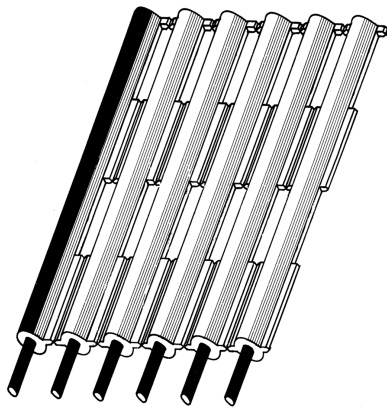

Unit: $\frac{\text{mm.}}{\text{Inch.}}$

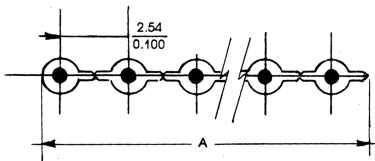

Circuits	Part Number AWG 26	Part Number AWG 22	Dimension A
2	9254 - 0226	9254 - 0222	4.44 (0.175)
3	9254 - 0326	9254 - 0322	6.98 (0.275)
4	9254 - 0426	9254 - 0422	9.52 (0.375)
5	9254 - 0526	9254 - 0522	12.06 (0.475)
6	9254 - 0626	9254 - 0622	14.60 (0.575)
7	9254 - 0726	9254 - 0722	17.14 (0.675)
8	9254 - 0826	9254 - 0822	19.68 (0.775)
9	9254 - 0926	9254 - 0922	22.22 (0.875)
10	9254 - 1026	9254 - 1022	24.76 (0.975)
11	9254 - 1126	9254 - 1122	27.30 (1.075)
12	9254 - 1226	9254 - 1222	29.84 (1.175)
13	9254 - 1326	9254 - 1322	32.38 (1.275)
14	9254 - 1426	9254 - 1422	34.92 (1.375)
15	9254 - 1526	9254 - 1522	37.46 (1.475)
16	9254 - 1626	9254 - 1622	40.00 (1.575)
17	9254 - 1726	9254 - 1722	42.54 (1.675)
18	9254 - 1826	9254 - 1822	45.08 (1.775)
19	9254 - 1926	9254 - 1922	47.62 (1.875)
20	9254 - 2026	9254 - 2022	50.16 (1.975)
21	9254 - 2126	9254 - 2122	52.70 (2.075)
22	9254 - 2226	9254 - 2222	55.24 (2.175)
23	9254 - 2326	9254 - 2322	57.78 (2.275)
24	9254 - 2426	9254 - 2422	60.32 (2.375)
25	9254 - 2526	9254 - 2522	62.86 (2.475)
26	9254 - 2626	9254 - 2622	65.40 (2.575)
27	9254 - 2726	9254 - 2722	67.94 (2.675)
28	9254 - 2826	9254 - 2822	70.48 (2.775)