

FLEXIBLE MONO COLOUR FLAT CABLE



9396 SERIES. AWG 18-22. 3.96mm(0.156")


Features

- Available in 2 through 24 circuits. Insulator: PVC Grey
- UL 2651 (300V – 105°C) Flame test: VW-1
- Mat. Conductor: Over coated stranded copper tinned
- Notched cable is also available. (Consult the Sales Office)
- Used in PCB connectors or IDC Connectors
- Insulation Resistance: 5 MΩ/min.
- Dielectric strength test: 2000 VAC/1 minute
- The colour on the first conductor: Red strip (AWG 22) or Orange (AWG 18)
- Sections: AWG 22 (7 x 0.25) or AWG 18 (19 x 0.25)

Dimensional Information

Ordering and Dimensional Information

Unit: $\frac{\text{mm.}}{\text{Inch.}}$

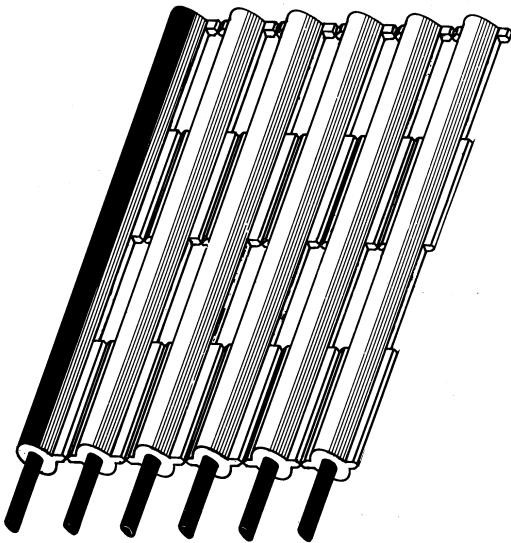

Circuit Size	Part Number AWG 18	Part Number AWG 22	Dimension A
2	9396 - 0218	9396 - 0222	6.74 (0.265)
3	9396 - 0318	9396 - 0322	10.70 (0.421)
4	9396 - 0418	9396 - 0422	14.66 (0.577)
5	9396 - 0518	9396 - 0522	18.62 (0.733)
6	9396 - 0618	9396 - 0622	22.58 (0.889)
7	9396 - 0718	9396 - 0722	26.54 (1.045)
8	9396 - 0818	9396 - 0822	30.50 (1.201)
9	9396 - 0918	9396 - 0922	34.46 (1.357)
10	9396 - 1018	9396 - 1022	38.42 (1.513)
11	9396 - 1118	9396 - 1122	42.38 (1.669)
12	9396 - 1218	9396 - 1222	46.34 (1.824)
13	9396 - 1318	9396 - 1322	50.30 (1.980)
14	9396 - 1418	9396 - 1422	54.26 (2.136)
15	9396 - 1518	9396 - 1522	58.22 (2.292)
16	9396 - 1618	9396 - 1622	62.18 (2.448)
17	9396 - 1718	9396 - 1722	66.14 (2.604)
18	9396 - 1818	9396 - 1822	70.10 (2.760)
19	9396 - 1918	9396 - 1922	74.06 (2.916)
20	9396 - 2018	9396 - 2022	78.02 (3.072)
21	9396 - 2118	9396 - 2122	81.98 (3.228)
22	9396 - 2218	9396 - 2222	85.94 (3.383)
23	9396 - 2318	9396 - 2322	89.90 (3.539)
24	9396 - 2418	9396 - 2422	93.86 (3.695)

