

# CRIMP TERMINAL



## 2378 SERIES. 2.50 mm. (0.098") Pitch housing

### General Features

- Accommodates wire range AWG 22 through 28
- Use in housing 2.50 mm pitch 2375 and 2478 series
- Box contact with tin plated locking lance
- Maximum insulation diameter 1.90 mm (0.075")

### Materials

- Contact: Phosphor bronze
- Operating temperature -40°C to +85°C





### Electrical Features

- Current rating: <3 A
- Contact resistance: < 20 mΩ


### Mechanical Features

- Durability: 25 cycles
- Wire pull-out force:
  - 5.00 Kgf 22 AWG
  - 3.00 Kgf 24 AWG
  - 2.00 Kgf 26 AWG
  - 1.00 Kgf 28 AWG

### Dimensional Information

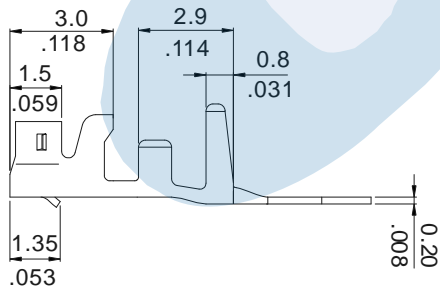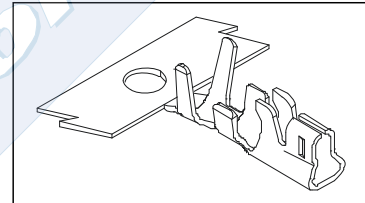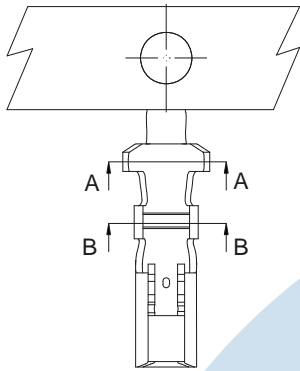

SEC. A-A



SEC. B-B

**2378 - 2- 00- E**  
1 2

1. Terminal Serie

2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose Piece