

# 2.54mm VERTICAL DIP ZIF CONNECTOR



## 2602 SERIES. 2.54mm(0.100"). For PCB Solder

### Features

- Available in 8, 9, 10, 11, 12, 13 and 14 circuits
- Low insertion force and high contact pressure
- Insulator Material: Nylon 6/6 UL 94V-0
- Contact Material: Phosphor bronze in Tin plated
- With upper locking device
- With clinched solder tail contact
- Applicable P.C. Board thickness: 1.60mm(.063")



### Dimensional Information

### Ordering and Dimensional Information


Unit:  $\frac{\text{mm.}}{\text{Inch.}}$

Circuit Size	Part Number	Dimensions			
		A	B	C	D
08	2602-2081	17,78(0,700)	23,11(0,910)	27,05(1,065)	10,16(0,400)
09	2602-2091	20,32(0,800)	25,65(1,010)	29,59(1,165)	12,70(0,500)
10	2602-2101	22,86(0,900)	28,19(1,110)	32,13(1,265)	15,24(0,600)
11	2602-2111	25,40(1,000)	30,73(1,210)	34,67(1,365)	17,78(0,700)
12	2602-2121	27,94(1,100)	33,27(1,310)	37,21(1,465)	20,32(0,800)
13	2602-2131	30,48(1,200)	35,81(1,410)	39,75(1,565)	22,86(0,900)
14	2602-2141	33,02(1,300)	38,35(1,510)	42,29(1,665)	25,40(1,000)



For 8, 9, 10, 11, 13 and 14 Circuits

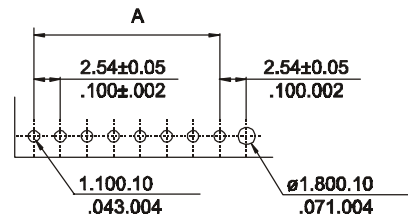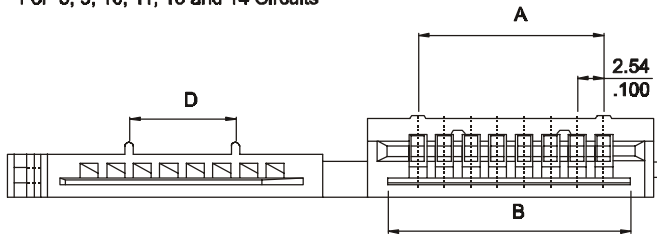

RECOMMENDED HOLE PATTERN

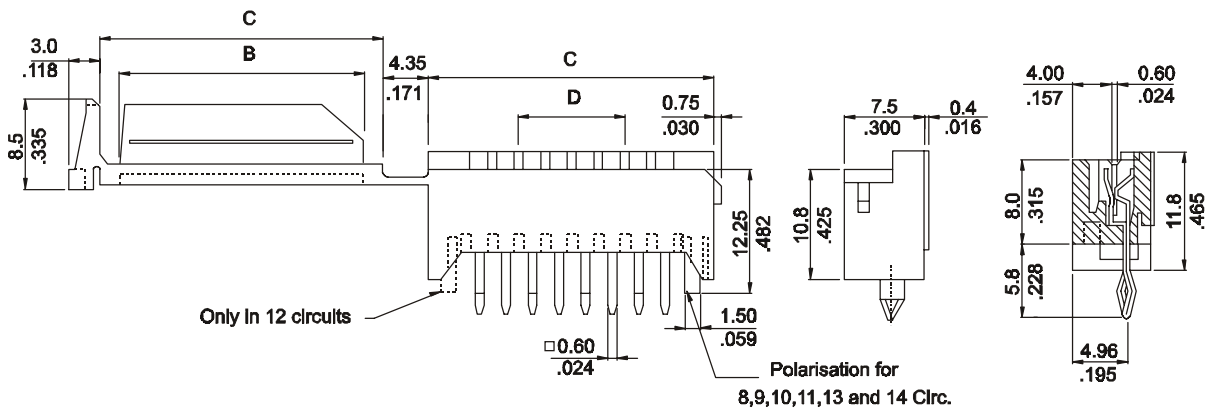

For 12 circuits

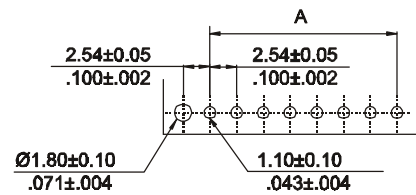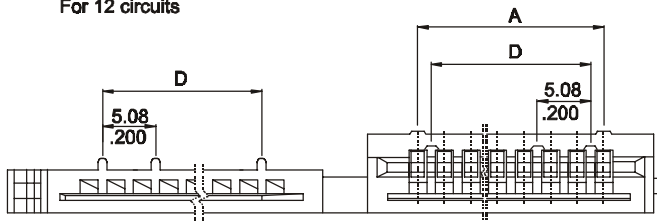

RECOMMENDED HOLE PATTERN