

# SINGLE ROW RIGHT ANGLE HEADER




## 2868 SERIES. 2.54mm(0.100"). For PCB Solder

### Features

- Available in 2 through 12 circuits
- Insulator Material: Glass filled PCT UL 94V-0
- 0.64mm square pin in tin-plated brass
- Mates with 2866 series type 3 housing
- Positive latch retains connector after mating
- Standoffs minimise flux retention



### Dimensional Information

### Ordering and Dimensional Information



Unit: mm.  
Inch.

Circuit Size	Part Number	Dimensions	
		A	B
02	2868-2021	2,54(0,100)	7,62(0,300)
03	2868-2031	5,08(0,200)	10,16(0,400)
04	2868-2041	7,62(0,300)	12,70(0,500)
05	2868-2051	10,16(0,400)	15,24(0,600)
06	2868-2061	12,70(0,500)	17,78(0,700)
07	2868-2071	15,24(0,600)	20,32(0,800)
08	2868-2081	17,78(0,700)	22,86(0,900)
09	2868-2091	20,32(0,800)	25,40(1,000)
10	2868-2101	22,86(0,900)	27,94(1,100)
11	2868-2111	25,40(1,000)	30,48(1,200)
12	2868-2121	27,94(1,100)	33,02(1,300)

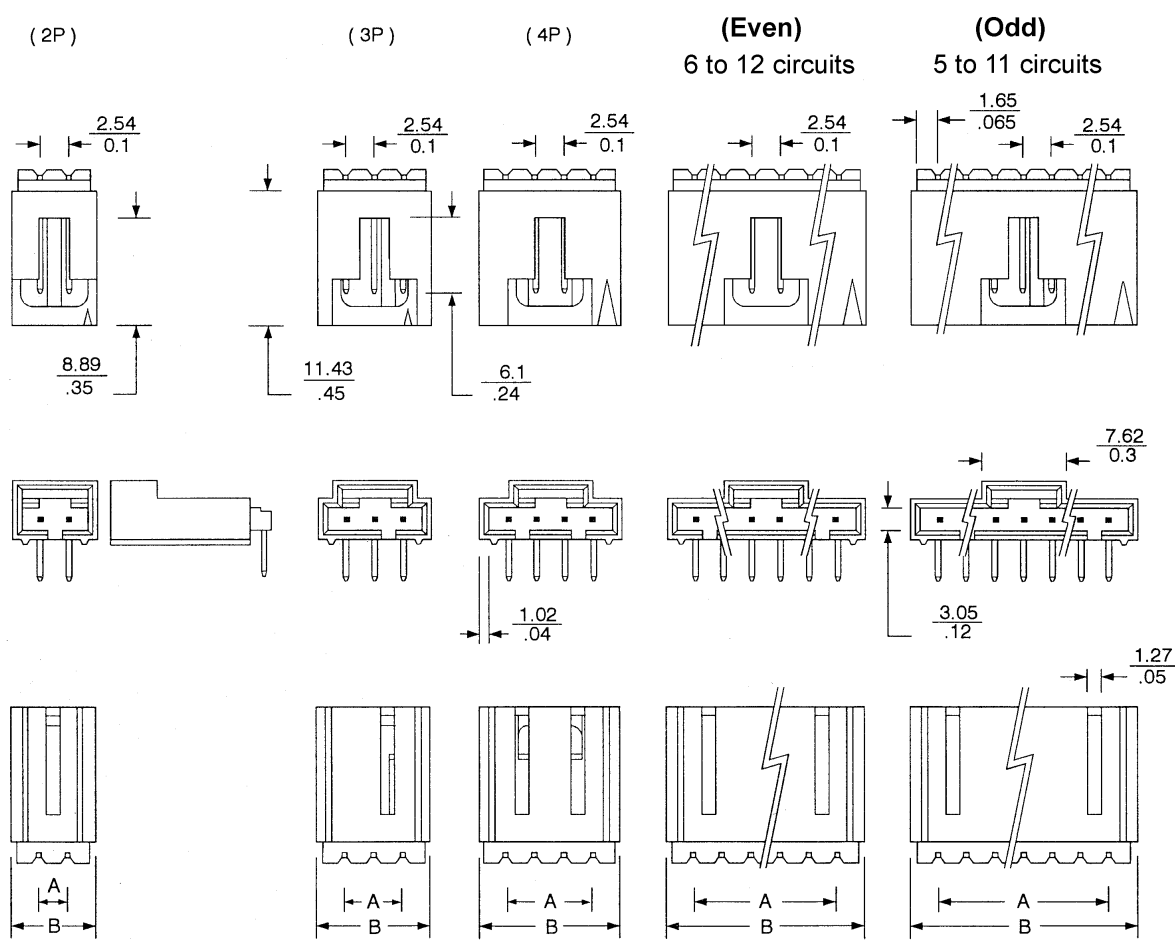

### RECOMMENDED HOLE PATTERN