

CRIMP TERMINAL HOUSING




5081 SERIES. 5.08mm(0.200"). With Locking Ramp

Features

- Available in 2 through 12 circuits
- Insulator Material: Nylon 6/6 UL 94V-2
- Accepts 3933 and 3934 series crimp terminals
- Mates with 3963, 3966, 3968, 3986, 3987 and 3988 series
- Moulded pull tab
- Moulded in locking arm for terminal retention
- Polarisation through varied centre spacing between circuit 1 and 2
- For **GWT** option (Glow Wire Test Approval), please add **E** at the end of Part Number (Example: 5081-XXXXE)

Dimensional Information

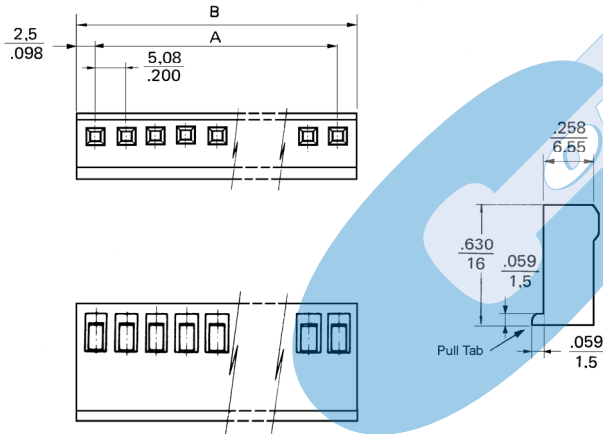

Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
02	5081-2021	5,08(0,200)	10,06(0,396)
03	5081-2031	10,16(0,400)	15,14(0,596)
04	5081-2041	15,24(0,600)	20,22(0,796)
05	5081-2051	20,32(0,800)	25,30(0,996)
06	5081-2061	25,40(1,000)	30,38(1,196)
07	5081-2071	30,48(1,200)	35,46(1,396)
08	5081-2081	35,56(1,400)	40,54(1,596)
09	5081-2091	40,64(1,600)	45,62(1,796)
10	5081-2101	45,72(1,800)	50,70(1,996)
11	5081-2111	50,80(2,000)	55,78(2,196)
12	5081-2121	55,88(2,200)	60,86(2,396)